

LAIKO

ADZ
ADX




**Horizontal End-Suction
Centrifugal Pump**

LAIKO

ADZ/ADX

Horizontal End-Suction Centrifugal Pump

PUMP AND SYSTEM SOLUTION PROVIDER

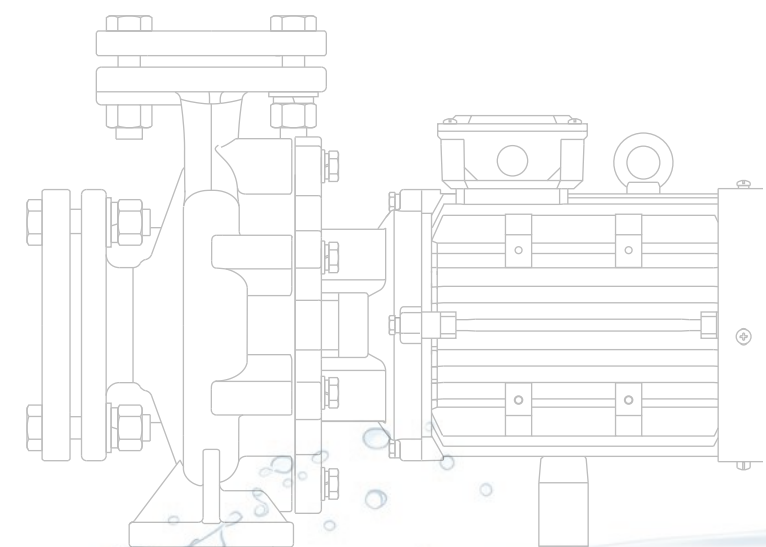

Superior in Pump, Superior in Energy-Saving.

www.Laikopump.com



LAIKO Laiko Pump
Pump and System Solution Provider

LAIKO Pump(Zhejiang) Co., Ltd. is a subsidiary of Zhejiang Dayuan Pumps Industrial Co., Ltd. (Stock code: 603757), focusing on the research and manufacturing of energy-saving pumps.

LAIKO's applications cover the fields of construction, municipal, and industrial sectors. Currently, we have product lines including Inline Multistage Pumps, Inline Circulation Pumps, Horizontal Multistage Pumps, Cold and Hot Water Circulation Pipeline Pumps, Single-Stage Centrifugal Pumps, Standard Centrifugal Pumps, Stainless steel Horizontal Single-Stage Centrifugal Pumps, Submersible Sewage Pumps, and Immersed Multistage Centrifugal Pumps. Our products are exported to many countries and regions in Europe, America, and Asia, meeting local legal requirements and obtaining recognition from clients.

A standard research and development, production, sales, and service system has laid the core competitiveness and sustainable development space for LAIKO. Reliable product quality and thoughtful after-sales service have earned LAIKO widespread reputation.

LAIKO maintains a pioneering spirit, always adheres to the concept of technological innovation, and never stops exploring energy-saving endeavors!

**Research and manufacturing of energy-saving pumps,
providing pump and system solutions**

With over 34 years of accumulated strength, we have formed an alliance with top domestic water pump research and development, production, sales, and technical teams, Established Zhejiang Laiko Pump Industry Co., Ltd. (referred to as Zhejiang Leike), with comprehensive strength ranking among the top in the industry.

The second-generation green intelligent factory of Industry 4.0 standard covers an area of nearly 200 acres, with an annual output of over 7 million units and a total investment of over 1 billion yuan.

Zhejiang Laiko has established a comprehensive sales and service network nationwide, with direct offices in major cities. Our products are exported to multiple countries and regions in Europe, America, and Asia. China Laiko pumps globally.



Dayuan Pump Group and its subsidiary Laiko Pump Industry have implemented a significant strategic layout. Covering an area of nearly 200 acres with a total investment of approximately 1 billion RMB, the facility has an annual production capacity of 7 million units. It is a modern integrated factory that combines production, research and development, manufacturing, and logistics.



R&D STRENGTH

346	29	242	75	6
Domestic patents	Invention Patent	New utility patent	Appearance patent	Overseas patents

As a brand under Dayuan Pump Group, we have a strong foundation with over 177 R&D personnel and more than 352 patents. Our products have been honored with titles such as "Zhejiang Famous Brand Product" and "Zhejiang Export Famous Brand," and are exported to multiple countries and regions across Europe, America, and Asia. Our comprehensive strength ranks among the top in the industry. Through years of continuous investment in research and development, we have established a significant technological innovation advantage.



SERVICE COOPERATION

We have established offices in major cities across the country, supported by a professional and efficient service team. From consultation, purchase, after-sales, to maintenance, we provide high-quality, professional, timely, and attentive services at every stage.

Guided by the principle of "wholehearted dedication and customer-first," we respond quickly to customer needs, offering precise product recommendations and tailored solutions. Our comprehensive and full-cycle services ensure a worry-free experience for our customers.

SERVICE TENET: With all our heart and soul, Putting customers first

SERVICE TENET: Rapid response, Precise solution

SERVICE OBJECTIVES: Efficient O&M, Win-Win Cooperation



LAIKO

ADZ / ADX

Horizontal End-Suction Centrifugal Pump



Superior in Pump, Superior in Energy-Saving.
www.laikopump.com

LAIKO Laiko Pump (Zhejiang) Co., Ltd.

ADZ/ADX

Horizontal End-Suction Centrifugal Pump

The ADZ/ADX series is a non-self-priming, single-stage, single-suction, horizontal pump with axial water inlet and radial water outlet. The bottom of the pump body is fixed to the base. The hydraulic design based on CFD makes it more efficient than conventional products in the market.

The whole pump is designed in 3D and its strength is checked by FEA. The ADZ series motors feature an extended shaft design, which reduces the number of parts and increases reliability. The ADX series features a universal modular design, allowing different bearing housings to be selected according to the actual load of customers.

Standardly equipped with a YE3 motor, it ensures energy conservation and long-term economic operation.

The installation dimensions and performance comply with the DIN EN 733 standard. Equipped with standard wear-resistant mechanical seal.

Flange pressure PN 16 complies with DIN 2533 standards (PN25 is optional).

APPLICATION FIELD


Water Supply System
Heating and Air Conditioning System
Boosting Water Supply, Constant Pressure Water Supply
Fire Sprinkler System
Irrigation and Livestock Use
Industrial Cooling
Heating Cycle System Industrial Conveying
Drain off System

TECHNICAL DATA


Maximum flow rate: 1200m³/h
Maximum head: 90m
Maximum working pressure: 10bar
(16bar/25bar optional)
Medium temperature: 0°C-120°C
Maximum ambient temperature: +40°C
Maximum altitude: 1000m
import flange: DN50-DN300
export flange: DN32-DN250



Application Scope

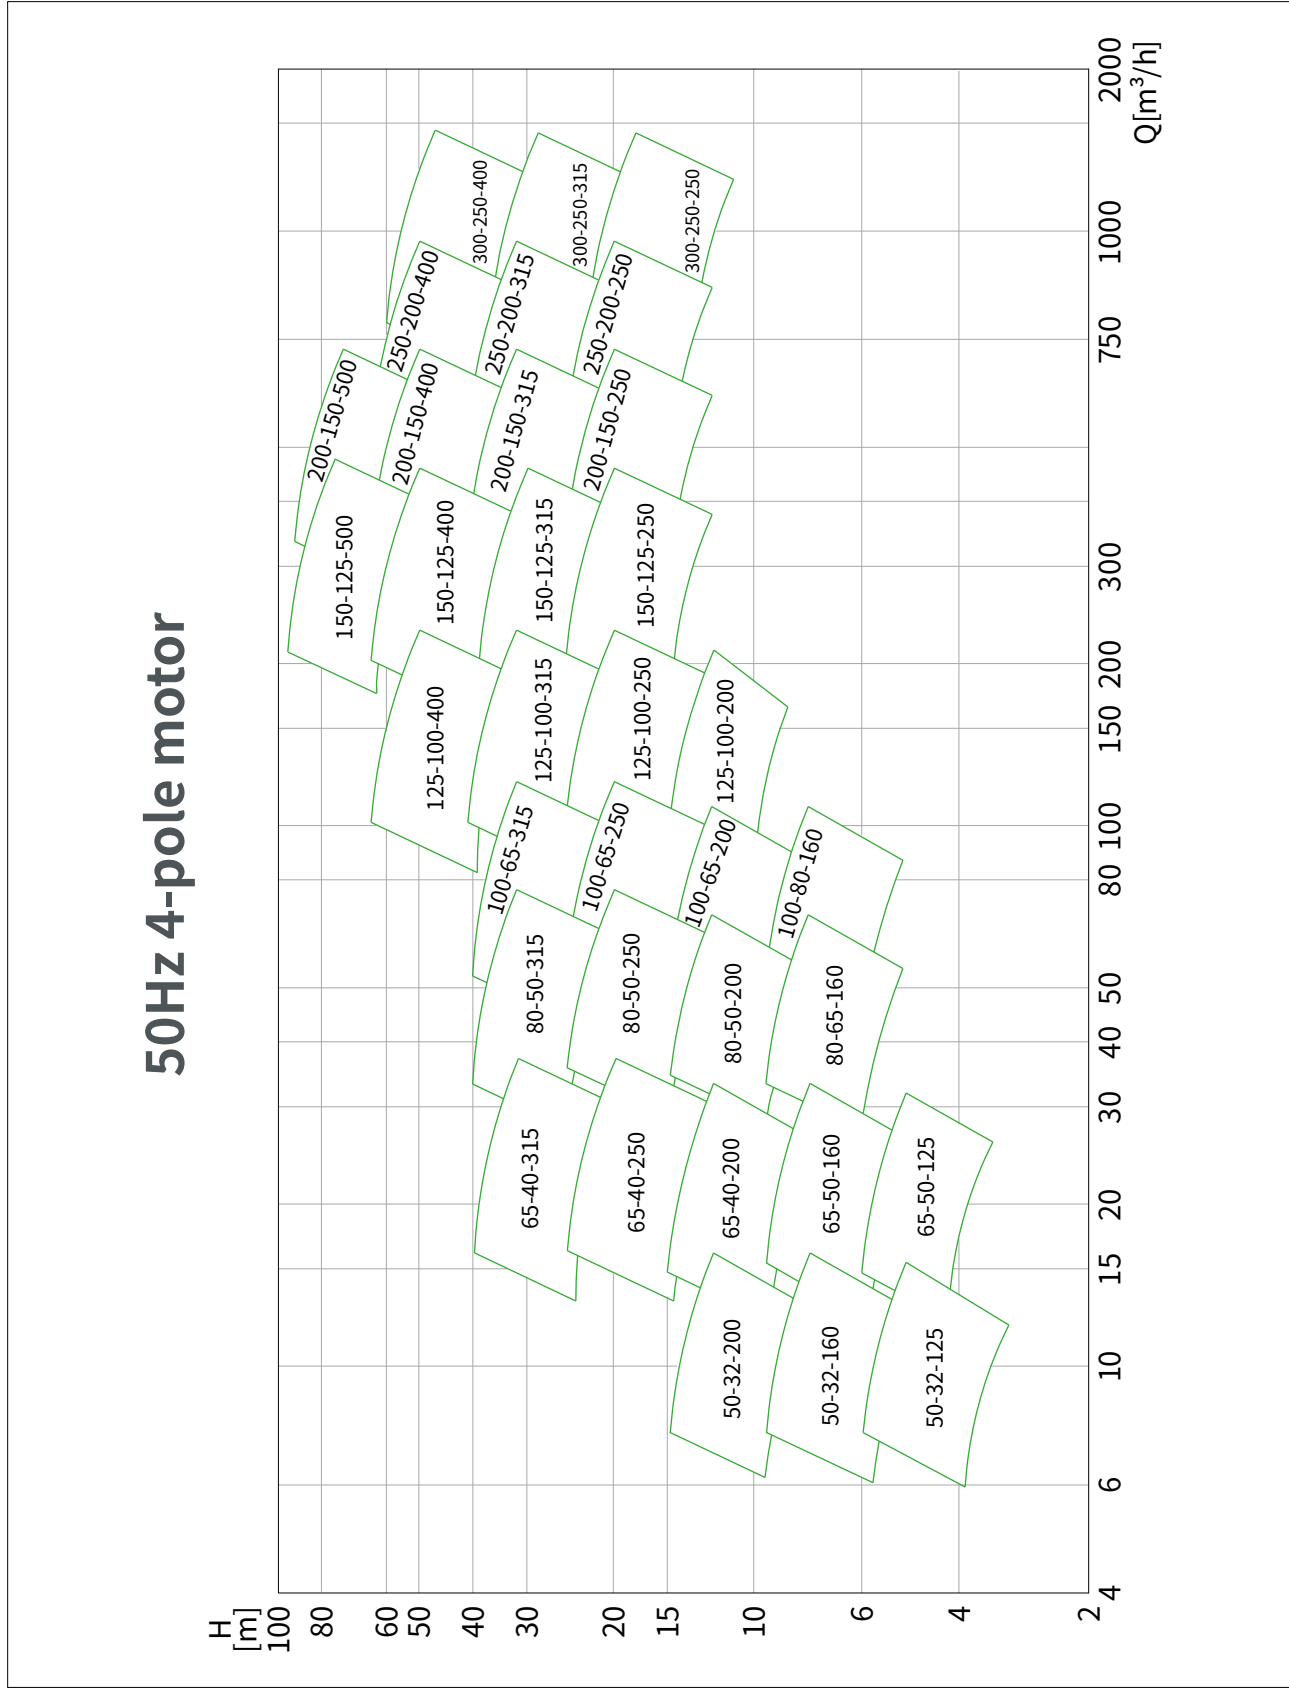

Application Scope

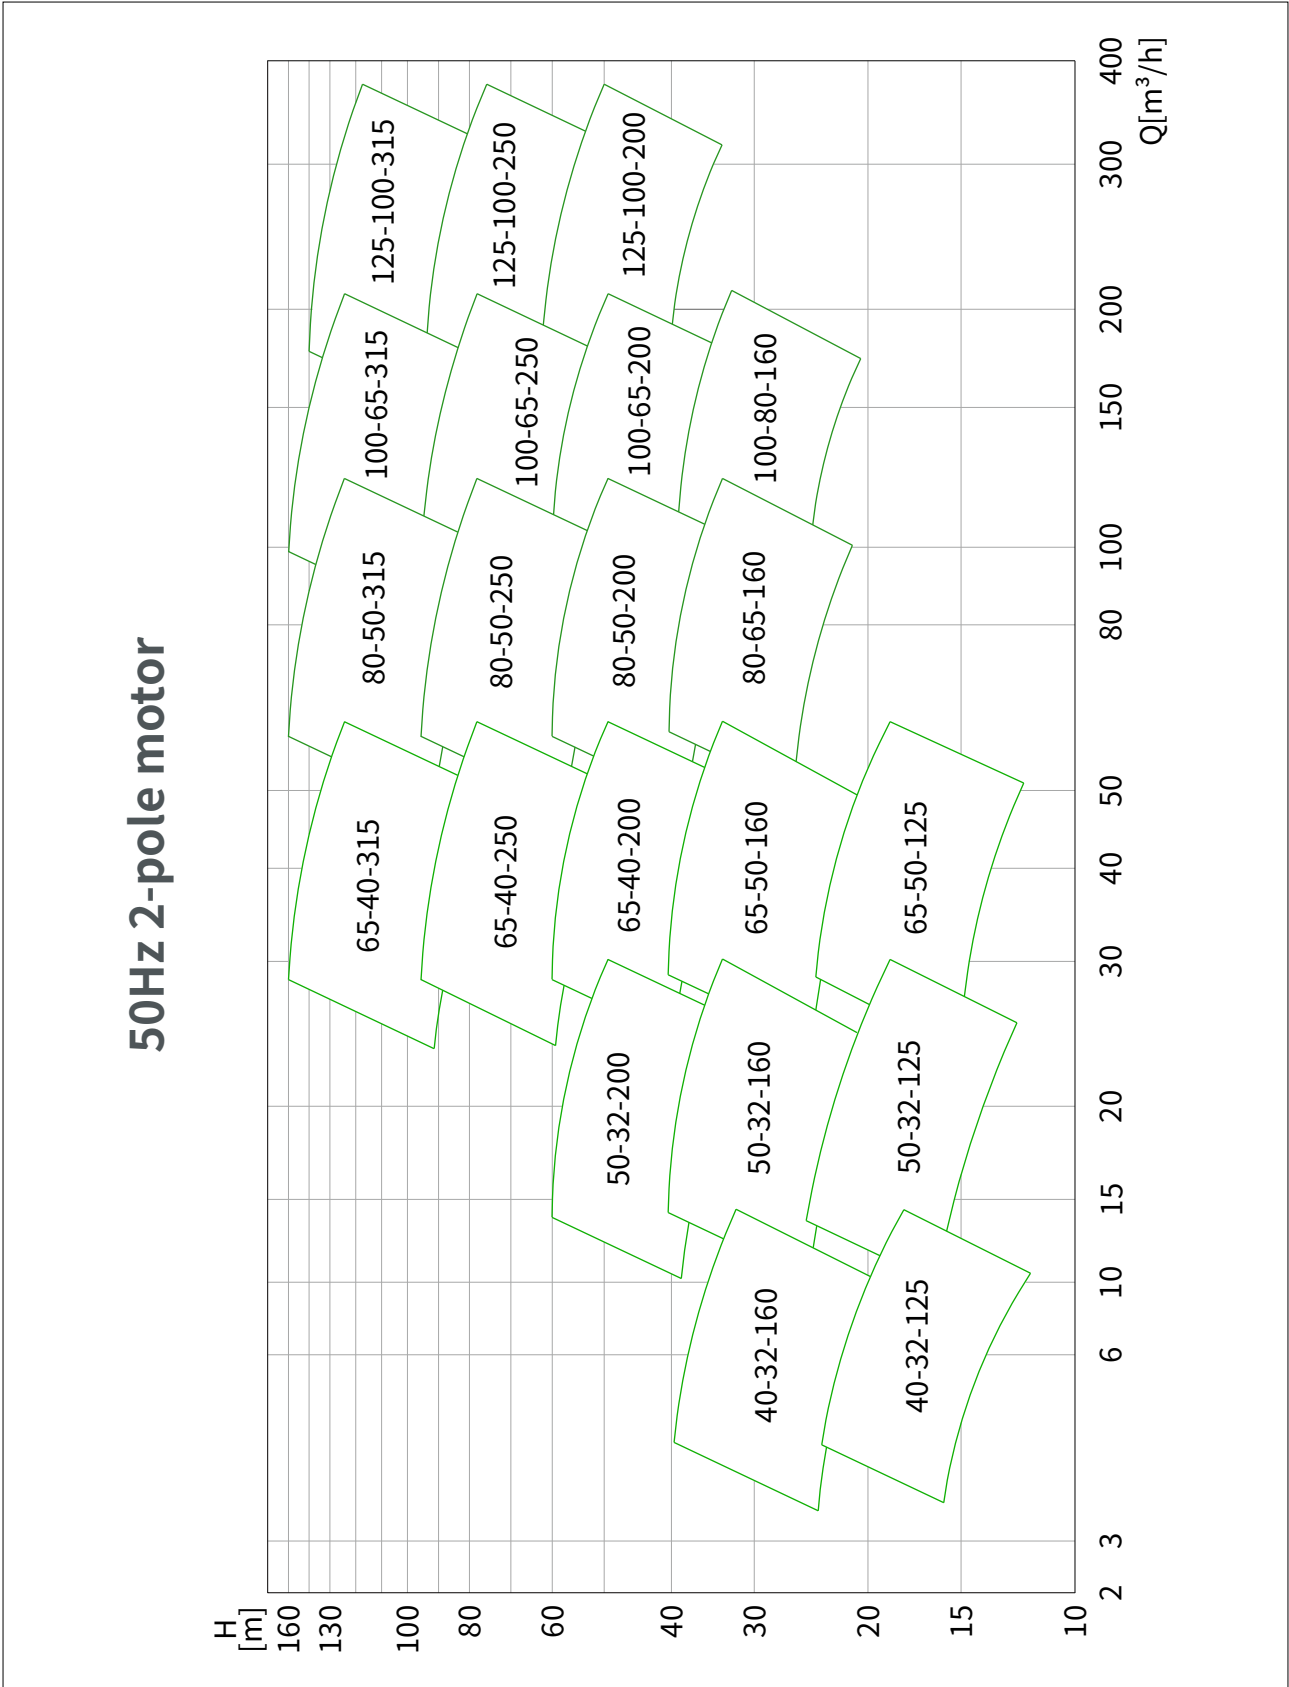

Model Description

ADZ150-125-250 A/B/4SWS

ADZ 150 - 125 - 250 A/B / 4 m W S

S:AISI304 impeller; H:HT200 impeller;
Q:QT450 impeller; F:AISI304 flow passage components
L1: 316; L: 316L; J: 2205

W: 50Hz; L: 60Hz
three-phase($\leq 3\text{kW}$ is 220/380V; $> 3\text{kW}$ is 380V)(omitted)
m:single-phase220V B:pump body

motor pole number
Cutting type(A: single cutting, B: double cutting)

nominal diameter of the impeller(mm)
discharge port diameter(mm)
suction port diameter(mm)
horizontal end-suction centrifugal pump(direct-coupled type)

ADX150-125-250 A/B/4SWS

ADX 150 - 125 - 250 A/B / 4 m W S

S:AISI304 impeller; H:HT200 impeller;
Q:QT450 impeller; F:AISI304 flow passage components
L1: 316; L: 316L; J: 2205

W: 50Hz; L: 60Hz
three-phase($\leq 3\text{kW}$ is 220/380V; $> 3\text{kW}$ is 380V)(omitted)
m:single-phase220V B:pump body

motor pole number
Cutting type(A: single cutting, B: double cutting)


nominal diameter of the impeller(mm)
discharge port diameter(mm)
suction port diameter(mm)
horizontal end-suction centrifugal pump(suspended type)

Minimum Inlet Pressure

If the pressure in the pump is lower than the vaporization pressure of the conveyed liquid, cavitation may occur. To avoid cavitation, ensure there is a minimum pressure on the pump inlet side. The maximum suction lift H (m) can be calculated using the following formula:
$$H = P_b \times 10.2 - \text{NPSH} - H_f - H_v - H_s$$

 H —maximum suction lift(m)
 P_b —atmospheric pressure(bar)
In a closed pipeline, it can be considered the system pressure of the closed system.
 NPSH —Net Positive Suction Head(m)
It can be read from the NPSH curve at the point corresponding to the maximum flow on the performance curve.
 H_f —pipeline losses at the inlet(m)
It's the value corresponding to the maximum possible flow rate in the pipeline.
 H_v —vapor pressure of the liquid(m)
Its value depends on the temperature of the liquid and its vapor pressure.
 H_s —safety margin(m)
Minimum of 0.5 meters head.

If, through calculation, " H " is a positive value, it indicates that the pump can operate with the maximum suction lift " H "; If " H " is a negative value, it indicates that the pump must have a minimum inlet pressure with a head of " H " meters to operate normally.

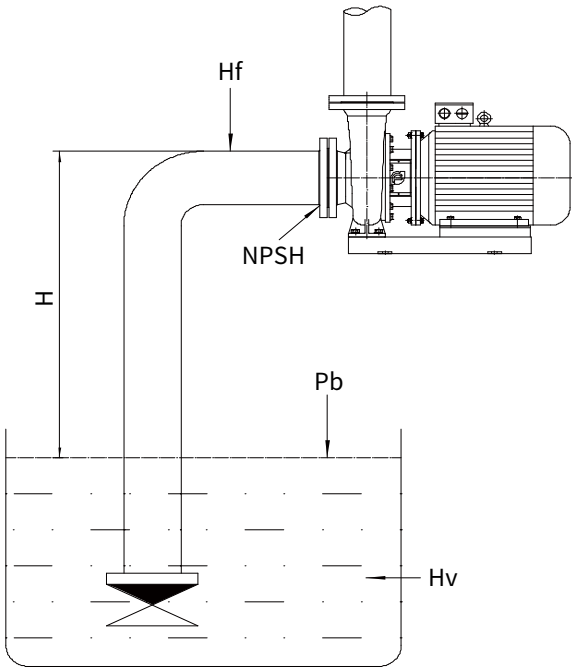

Note: Generally, the above calculation is not performed. The calculation of " H " is only necessary when using the pump under the following conditions:

1. The liquid temperature is high.
2. The liquid flow rate exceeds the rated value.
3. The suction lift is large or the inlet pipeline is long.
4. The system pressure is too low.
5. The inlet conditions are poor.

Typical Application

The product is suitable for use in liquids that are clean, thin, non-corrosive, non-flammable, non-explosive, and free of solid particles or fibers.

Water supply system
Heating and air conditioning system
Pressurized water supply, constant pressure water supply
For irrigation and livestock farming use
Industrial cooling
Industrial transportation in heating circulation system
Drainage system

Performance Parameter

Maximum flow rate: 1200m³/h
Maximum head: 90m
Maximum working pressure: 10bar(16bar or 25bar is optional.)
Medium temperature: 0°C~120°C
Ambient temperature: up to +40°C
Altitude: up to 1000m
Import flange: DN50~DN300
Export flange: DN32~DN250

Operating Conditions

Relative humidity of the pump:
The pump is specially designed to be installed in a non-corrosive and non-explosive environment. The relative humidity shall not exceed 95%.
Environmental humidity and altitude:
Environmental humidity and the installed altitude are important factors affecting the service life of the motor, as they have an impact on the lifespan of the bearing and the insulation system.
The installed altitude refers to the height of the installation location above sea level. If the environmental humidity exceeds the recommended maximum ambient temperature, or the installation height exceeds the recommended maximum altitude, due to the lower density and poorer air cooling effect, the motor shall not be operated at full load. In such cases, a motor with a higher output power should be selected.

Motor


The motor is a totally enclosed standard air-cooled motor, and its main dimensions comply with the GB/T 28575 standard.
The motor frequency is 50Hz, 3PH, and 2-pole and 4-pole motors are provided as standard configurations.

Curve Conditions

The following criteria apply to the performance curves:
1. The curve tolerance complies with the standard of ISO9906, Appendix A.
2. All curves are based on measurements at 3×380V with the motor running at constant speeds of 2900rpm, 1480rpm, or 1450rpm.
3. The test medium is clean water at a temperature of 20°C, free of any solid impurities and air, and its kinematic viscosity $\nu = 1\text{mm}^2/\text{s}$ (1 cSt).
4. If the viscosity or density of the pumped liquid differs from that of water, motor performance adjustments are required.
5. The NPSHr curve corresponds to the value when the impeller diameter of this model is at its maximum. When selecting the model, a minimum safety margin of 0.5 meters should be added.

Installation Conditions


When installing the pipeline, it is necessary to ensure that the pump casing does not bear the pipeline stress. The dimensions of the suction pipe and the discharge pipe must be appropriate, and the inlet pressure of the pump should be taken into consideration simultaneously.
Install the pipeline to avoid creating air resistance, especially on the inlet side of the pump.
Install an isolating valve at each end of the pump respectively, so that there is no need to drain the system when the pump needs to be cleaned or repaired.
Ensure that sufficient support is provided for the pipeline (both on the inlet side and the outlet side) as close to the pump as possible. The butt flanges should be closely attached to the flanges of the pump without being subjected to tensile stress, because the existence of tensile stress will damage the pump.

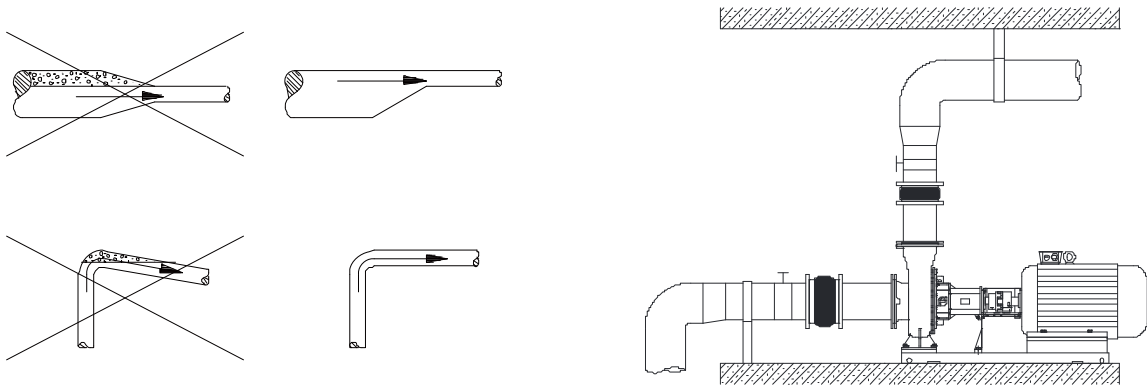

Product Structural Features

The extended shaft design features a compact structure, eliminating the impeller eccentricity issue and enabling smoother and more reliable operation.
The optimized hexagonal motor bracket provides optimal support stiffness while imparting a unified and harmonious product appearance.
The impeller and volute manufactured using the lost-foam process offer optimal hydraulic performance.
Multiple mechanical seal options are provided to suit diverse customer applications. The mechanical seal chamber dimensions designed in accordance with EN12756 standard ensure excellent interchangeability.
The pump cover with standard interfaces can be connected to a vent plug or a mechanical seal flushing pipeline.
The product comes standard with a YE3 high-efficiency motor and can be paired with bearings from well-known brands such as SKF.
The specially designed hexagonal bearing housing ensures both strength and aesthetics. It is equipped with self-lubricating sealed bearings from leading brands like SKF, and rubber dust seals are installed at both ends to maximize the smoothness and reliability of the shaft system rotation.

Structure Diagram

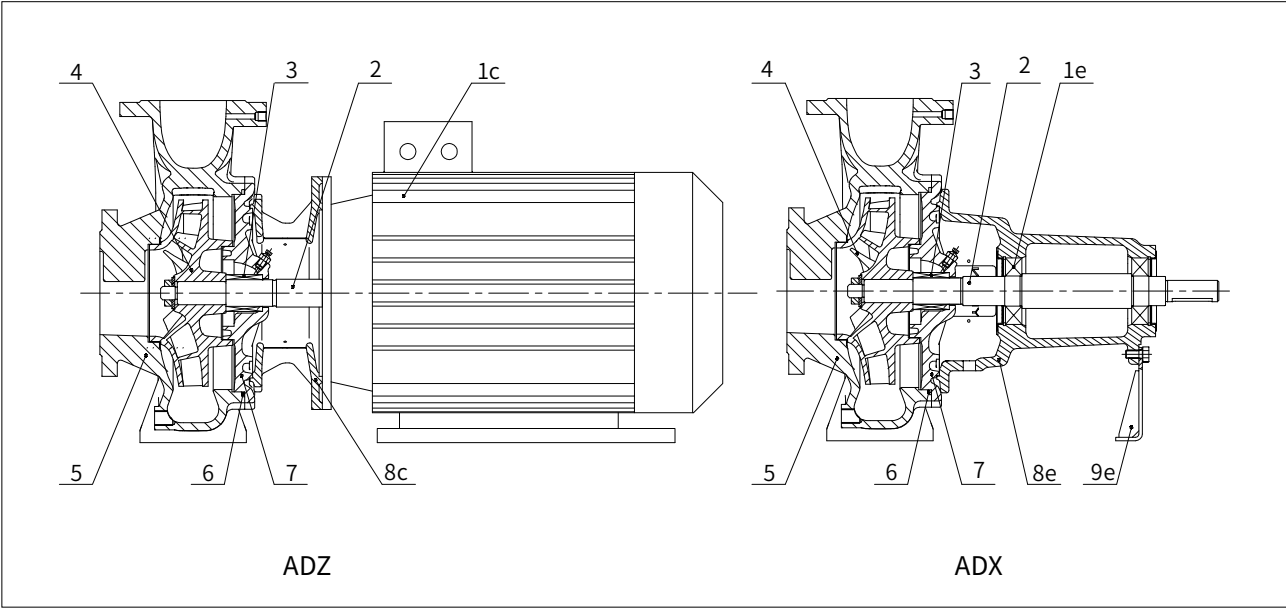

Parts Material

NO.	Parts	Materials	
		Standard Configuration	Optional Configuration
1c	Motor	YE3 high-efficiency motor	Optional
1e	Bearing	Maintenance-free bearing	SKF, NSK, etc.
2	Pump shaft	45#	2Cr13
3	Mechanical seal	Standard graphite and silicon carbide + EPDM	Optional
4	Impeller	HT200	QT450, 304, etc.
5	Pump body	HT250	QT450, 304, etc.
6	O-ring	Ethylene-propylene rubber(EPR)	Fluororubber, etc.
7	Pump cover	HT250	QT450, 304, etc.
8c	Motor bracket	HT250	QT450, 304, etc.
8e	Bearing box	HT250	/
9e	Bracket foot	45#	/

Performance Parameters Form50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m ³ /h)	Head(m)	Matching power(kw)	NPSHr(m)
1	50-32-200	8.8	15.1	1.1	1.5
		12.5	14		
		16.3	12.1		
2	50-32-200A	8.0	13.5	0.75	1.5
		11.5	12		
		15.0	10.2		
3	50-32-200B	7.5	12.5	0.75	1.5
		10.5	11		
		13.7	9.5		
4	65-50-160	17.5	9.9	1.1	1.5
		25	9		
		32.5	8		
5	65-50-160A	16.4	7.8	1.1	1.8
		23.5	7		
		30.5	6		
6	65-50-160B	13	6.2	0.75	1.8
		21.5	5.5		
		28	4.5		
7	65-40-200	17.5	15.4	2.2	1.5
		25	14		
		32.5	12.4		
8	65-40-200A	16.4	13.2	1.5	1.8
		23.5	12		
		30.5	10.5		
9	65-40-200B	13	11.1	1.1	1.8
		21.5	10		
		28	8.6		
10	65-40-250	17.5	23.5	3.0	1.6
		25	22		
		32.5	20		
11	65-40-250A	14	20.1	2.2	1.8
		23.5	18		
		30.5	15.9		
12	65-40-250B	13	17.5	2.2	1.8
		21.5	16		
		28	14.3		
13	65-40-315	17.5	37.5	5.5	1.6
		25	36		
		32.5	32		
14	65-40-315A	16.4	33.5	5.5	1.8
		23.5	32		
		30.5	28.2		
15	65-40-315B	13	29.5	4.0	1.8
		21.5	28		
		28	24.2		

Performance Parameters Form 50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
16	80-65-160	35	9.8	2.2	2.0
		50	9		
		65	8		
17	80-65-160A	32.5	7.7	1.5	2.2
		46.5	7		
		60.5	6.1		
18	80-65-160B	31	6.2	1.1	2.2
		44.5	5.5		
		58	4.3		
19	80-50-200	35	15	3.0	2.0
		50	14		
		65	12.2		
20	80-50-200A	32.5	13	3.0	2.2
		46.5	12		
		60.5	10		
21	80-50-200B	31	11	2.2	2.2
		44.5	10		
		58	8.6		
22	80-50-250	35	23.5	5.5	2.0
		50	22		
		65	20.2		
23	80-50-250A	32.5	21.8	5.5	2.2
		46.5	20		
		60.5	17.5		
24	80-50-250B	31	19.6	4.0	2.2
		44.5	18		
		58	15.8		
25	80-50-315	35	37.2	11	2.0
		50	35		
		65	32		
26	80-50-315A	32.5	32.5	7.5	2.2
		46.5	30		
		60.5	27.2		
27	80-50-315B	31	26.2	5.5	2.2
		44.5	24		
		58	21.4		
28	100-80-160	56	9.9	3.0	2.3
		80	9		
		104	7.8		
29	100-80-160A	53.2	8.5	3.0	2.5
		76	7.5		
		98.8	6.3		
30	100-80-160B	50.8	6.9	2.2	2.5
		72.5	6		
		94.3	4.8		

Performance Parameters Form 50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
31	100-65-200	56	15.2	5.5	2.3
		80	14		
		104	12.2		
32	100-65-200A	53.2	13.2	4.0	2.5
		76	12		
		98.8	10.1		
33	100-65-200B	50.8	11.2	3.0	2.5
		72.5	10		
		94.3	7.8		
34	100-65-250	56	23.8	7.5	2.3
		80	22		
		104	20.2		
35	100-65-250A	53.2	21.7	7.5	2.5
		76	20		
		98.8	17.5		
36	100-65-250B	50.8	17.5	5.5	2.5
		72.5	16		
		94.3	13.5		
37	100-65-315	56	37	15	2.3
		80	35		
		104	32		
38	100-65-315A	53.2	32.5	11	2.5
		76	30		
		98.8	25.5		
39	100-65-315B	50.8	25.5	7.5	2.5
		72.5	23		
		94.3	18.5		
40	125-100-200	105	15.7	11	2.5
		150	14		
		195	11.6		
41	125-100-200A	98	13.7	7.5	2.8
		140	12		
		182	9.6		
42	125-100-200B	91	11.6	5.5	2.8
		130	10		
		169	8		
43	125-100-250	105	24.5	15	2.5
		150	22		
		195	18.8		
44	125-100-250A	98	22.5	15	2.8
		140	20		
		182	16.5		
45	125-100-250B	91	19.5	11	2.8
		130	18		
		169	14.8		

Performance Parameters Form 50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
46	125-100-315	105	38.2	22	2.5
		150	35		
		195	30.5		
47	125-100-315A	98	34.2	18.5	2.8
		140	30		
		182	25.5		
48	125-100-315B	91	28.5	15	2.8
		130	25		
		169	20.5		
49	125-100-315S	80	38.2	18.5	3.0
		115	35		
		150	30.5		
50	125-100-315SA	77	36.2	15	3.0
		100	32		
		130	27.5		
51	125-100-400	105	59.5	37	2.5
		150	56		
		195	48.5		
52	125-100-400A	98	51.5	30	2.8
		140	48		
		182	40.5		
53	125-100-400B	91	41.5	22	2.8
		130	38		
		169	30.5		
54	125-109-400S	80	59.5	30	3.0
		115	56		
		150	48.5		
55	125-100-400SA	77	53.5	22	3.0
		100	50		
		130	42.5		
56	150-125-250	210	24.8	30	3.2
		300	22		
		390	19		
57	150-125-250A	192	22.8	22	3.5
		275	20		
		358	16.4		
58	150-125-250B	175	18.5	18.5	3.5
		250	16		
		325	12.5		
59	150-125-315	210	38.5	45	3.2
		300	35		
		390	30.5		
60	150-125-315A	192	33.5	37	3.5
		275	30		
		358	25.5		

Performance Parameters Form 50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
61	150-125-315B	175	28.5	30	3.5
		250	25		
		325	20.5		
62	150-125-315S	150	38.5	37	3.5
		220	35		
		285	30.5		
63	150-125-315SA	140	35.5	30	3.5
		200	32		
		260	27.5		
64	150-125-400	210	62.6	75	3.2
		300	56		
		390	50.5		
65	150-125-400A	192	56.6	55	3.5
		275	50		
		358	44.2		
66	150-125-400B	175	48.5	45	3.5
		250	42		
		325	38.6		
67	150-125-400S	150	62.6	55	3.8
		220	56		
		285	49.5		
68	150-125-400S(A)	140	50.2	45	3.8
		200	50		
		260	42.5		
69	200-150-250	350	23.5	45	5.5
		500	20		
		600	15		
70	200-150-250A	315	21.5	37	5.8
		450	18		
		540	13		
71	200-150-315	350	39.4	75	5.5
		500	35		
		600	30.2		
72	200-150-315A	315	33.5	55	5.8
		450	30		
		540	24.8		
73	200-150-315B	280	27.6	45	5.8
		400	25		
		480	20.3		
74	200-150-315S	280	39	55	5.8
		400	35		
		480	30		
75	200-150-315SA	260	33.5	45	5.8
		375	30		
		450	25		

Performance Parameters Form

50Hz 4-pole motor ;Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
76	200-150-400	350	61	110	5.5
		500	56		
		600	49.5		
77	200-150-400A	315	55	90	5.8
		450	50		
		540	43.5		
78	200-150-400B	280	50.5	75	5.8
		400	45		
		480	38.5		
79	200-150-400S	280	60	90	5.8
		400	56		
		480	50.5		
80	200-150-400SA	260	55	75	5.8
		375	50		
		450	43.5		
81	200-150-500	350	91.5	200	5.3
		500	85		
		600	76		
82	200-150-500A	315	86	160	5.3
		450	80		
		540	71		
83	200-150-500B	280	81	132	5.3
		400	75		
		480	67		
84	250-200-250	500	24.5	55	6.5
		720	20		
		860	17		
85	250-200-250A	420	19.5	45	6.5
		600	17		
		720	14		
86	250-200-315	525	38	90	6.5
		750	32		
		900	30		
87	250-200-315A	455	33	75	7.0
		650	30		
		780	25		
88	250-200-315B	400	28	55	7.0
		580	25		
		700	20		
89	250-200-400	525	60	160	7.0
		750	55		
		900	49		
90	250-200-400A	455	55	132	7.0
		650	50		
		780	45		

Performance Parameters Form

50Hz 4-pole motor ; Rated speed: 1450rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
91	250-200-400B	420	50	110	7.0
		600	45		
		720	40		
92	300-250-250	560	24.5	75	8.5
		800	20		
		960	15.5		
93	300-250-250A	500	21.5	55	8.5
		720	17		
		860	14		
94	300-250-315	700	36.5	110	8.2
		1000	32		
		1200	27.5		
95	300-250-315A	630	32.5	90	8.5
		900	28		
		1080	23.5		
96	300-250-315B	560	29.5	75	8.5
		800	25		
		960	20.5		
97	300-250-400	700	61	200	8.2
		1000	55		
		1200	50.5		
98	300-250-400A	630	56.6	160	8.5
		900	50		
		1080	44.2		
99	300-250-400B	560	50.5	132	8.5
		800	45		
		960	38.5		
100	300-250-400C	560	45.5	110	8.5
		750	40		
		960	33.5		

Performance Parameters Form 50Hz 2-pole motor ; Rated speed: 2900rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
1	40-32-125	4.4	21.5	1.1	2.0
		6.3	20		
		8.2	18		
2	40-32-125A	3.9	17.5	0.75	2.0
		5.5	16		
		7.2	14		
3	40-32-160	4.4	37.5	3	2.0
		6.3	36		
		8.2	34		
4	40-32-160A	4.1	33.5	2.2	2.0
		5.9	32		
		7.6	30		
5	40-32-160B	3.9	31.5	1.5	2.0
		5.5	28		
		7.2	26		
6	50-32-125	8.8	21.5	1.5	2.2
		12.5	20		
		16.3	18		
7	50-32-125A	8.1	17.5	1.1	2.2
		11.5	16		
		15	14		
8	50-32-160	8.8	37.5	4	2.2
		12.5	36		
		16.3	34		
9	50-32-160A	8.1	33.5	3	2.2
		11.5	32		
		15	30		
10	50-32-160B	7.4	29.5	2.2	2.2
		10.5	28		
		13.7	26		
11	50-32-200	17.5	61.2	7.5	2.2
		25	56		
		32.5	49		
12	50-32-200A	16.5	55.1	7.5	2.4
		23.5	50		
		30.6	40.5		
13	50-32-200B	15.1	48.5	5.5	2.4
		21.5	44		
		28	35.2		
14	65-50-125	17.5	21.5	3	3.0
		25	20		
		32.5	18		
15	65-50-125A	16.5	17.5	2.2	3.0
		23.5	16		
		30.6	14		

Performance Parameters Form 50Hz 2-pole motor ; Rated speed: 2900rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
16	65-50-160	35	39	11	3.0
		50	36		
		65	32		
17	65-50-160A	31.5	35	7.5	3.2
		45	32		
		58.5	26.5		
18	65-50-160B	29.8	29	5.5	3.2
		42.5	26		
		55.3	20.5		
19	65-40-200	35	62	15	3.0
		50	56		
		65	49		
20	65-40-200A	31.5	51.5	11	3.2
		45	47		
		58.5	37.6		
21	65-40-200B	29.8	41.8	7.5	3.2
		42.5	38		
		55.3	30.6		
22	65-40-250	35	95.5	22	3.0
		50	88		
		65	80		
23	65-40-250A	31.5	80.3	18.5	3.2
		45	75		
		58.5	58.4		
24	65-40-250B	29.8	67.8	15	3.2
		42.5	62		
		55.3	50.4		
25	65-40-315	35	151	45	3.0
		50	140		
		65	128		
26	65-40-315A	31.5	138	37	3.2
		45	130		
		58.5	119		
27	65-40-315B	29.8	127	30	3.2
		42.5	120		
		55.3	108		
28	80-65-160	70	39.5	15	4.2
		100	36		
		130	31		
29	80-65-160A	66.5	35.5	15	4.5
		95	32		
		123	26		
30	80-65-160B	63	31.5	11	4.5
		90	28		
		117	22		

Performance Parameters Form50Hz 2-pole motor ; Rated speed: 2900rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
31	80-50-200	70	61	30	4.2
		100	56		
		130	50.5		
32	80-50-200A	66.5	55	22	4.5
		95	50		
		123	44.5		
33	80-50-200B	63	50.5	18.5	4.5
		90	45		
		117	39.5		
34	80-50-250	70	95	45	4.2
		100	88		
		130	81		
35	80-50-250A	66.5	87	37	4.5
		95	80		
		123	72.5		
36	80-50-250B	63	76.5	30	4.5
		90	70		
		117	62		
37	80-50-315	70	151	75	4.2
		100	140		
		130	128		
38	80-50-315A	66.5	131	55	4.5
		95	120		
		123	105		
39	80-50-315B	63	109.5	45	4.5
		90	100		
		117	84.5		
40	100-80-160	112	40.5	22	4.5
		160	36		
		192	31		
41	100-80-160A	105	34.5	18.5	4.8
		150	30		
		180	25		
42	100-80-160B	98	29.5	15	4.8
		140	25		
		168	20.5		
43	100-65-200	112	61	37	4.8
		160	56		
		192	50.5		
44	100-65-200A	105	52.8	30	5.0
		150	48		
		180	39.5		
45	100-65-200B	98	44.5	22	5.0
		140	40		
		168	32.5		



Performance Parameters Form50Hz 2-pole motor ; Rated speed: 2900rpm

NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
46	100-65-250	112	95	75	4.8
		160	88		
		192	81		
47	100-65-250A	105	87	55	5.0
		150	80		
		180	72		
48	100-65-250B	98	82	45	5.0
		140	75		
		168	65		
49	100-65-315	112	151	110	4.8
		160	140		
		192	128		
50	100-65-315A	105	140	90	5.0
		150	130		
		180	118		
51	100-65-315B	98	130	75	5.0
		140	120		
		168	108		
52	125-100-200	210	63	75	7.0
		300	56		
		360	49		
53	125-100-200A	182	54.9	55	7.0
		260	50		
		312	41.2		
54	125-100-200A	182	54.9	55	7.0
		250	50		
		312	41		
55	125-100-2000	154	49.5	45	7.0
		220	45		
		254	37.5		
56	125-100-250	210	88	90	7.0
		300	80		
		360	71		
57	125-100-250A	192	8.5	75	7.0
		275	75		
		358	65.8		
58	L25-100-250B	175	76.5	65	7.0
		250	70		
		325	62		
59	125-100-2508	154	88	75	7.0
		220	80		
		264	71		
60	25-100-2505A	140	78	55	7.0
		200	75		
		240	61		

Performance Parameters Form 50Hz 2-pole motor ; Rated speed: 2900rpm



NO.	Model	Flow(m³/h)	Head(m)	Matching power(kw)	NPSHr(m)
60	125-100-315	210	142.5	160	7.0
		300	130		
		360	108.5		
61	L25-100-A15	192	126.7	132	7.0
		275	115		
		358	92.7		
62	125-100-3156	175	115.6	110	7.0
		250	105		
		325	86.2		
63	125-100-3155	154	143	132	7.0
		220	130		
		264	108		
64	125-100-3158A	140	126	110	7.0
		200	115		

Performance Curves 50Hz 4-pole motor

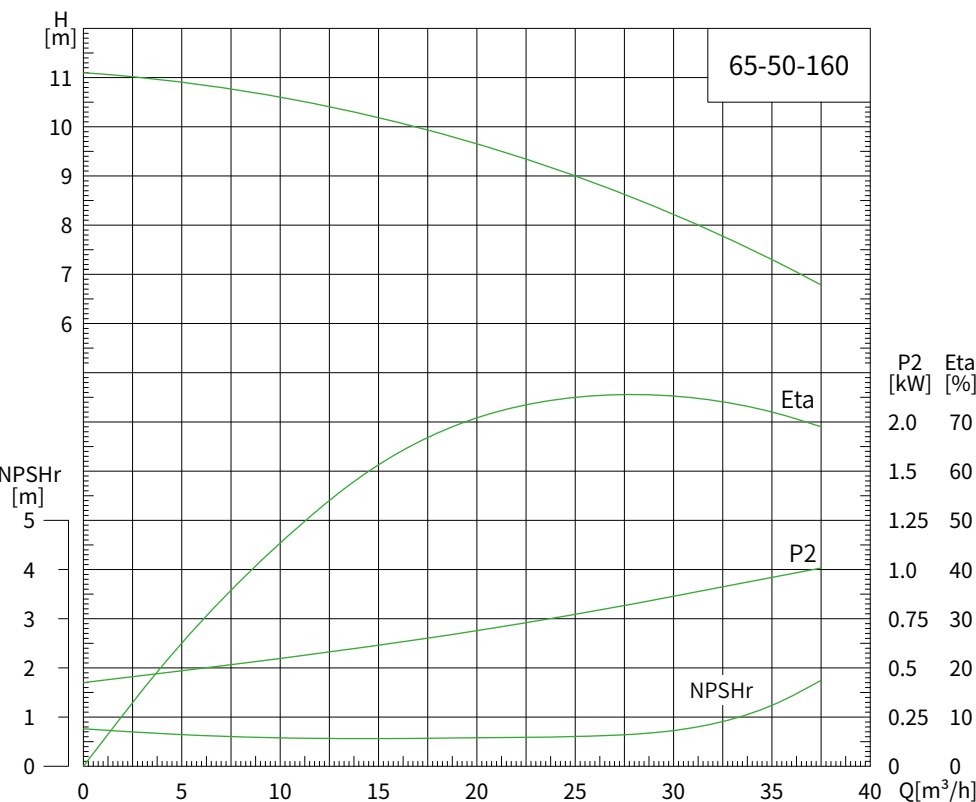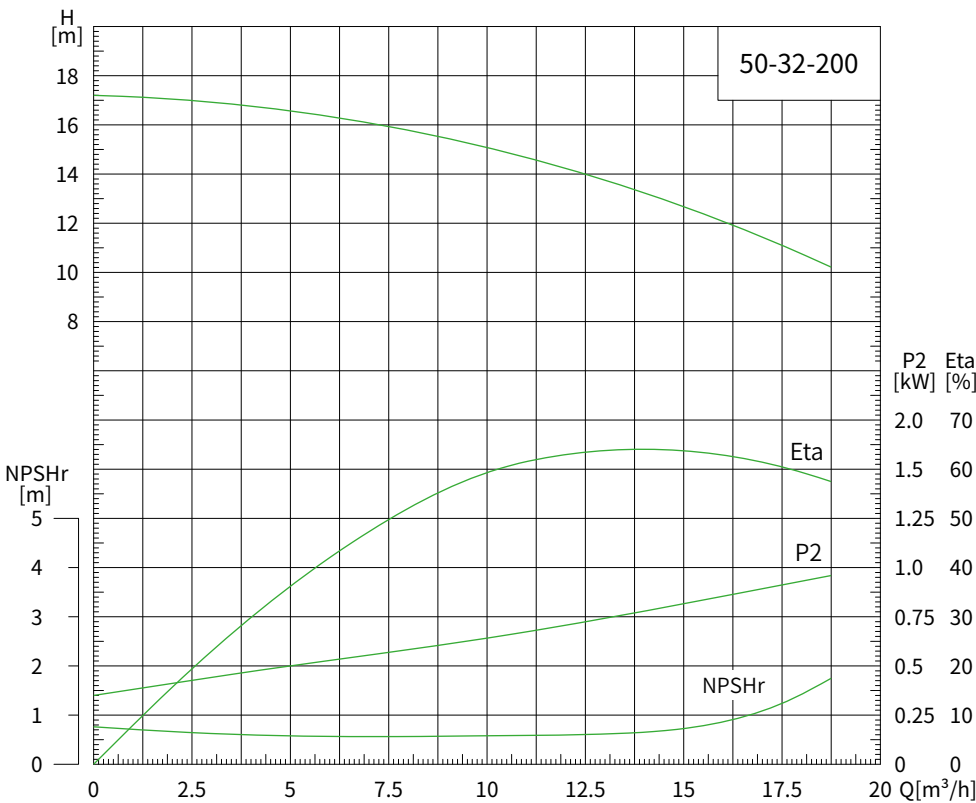



Performance Curves

50Hz 4-pole motor

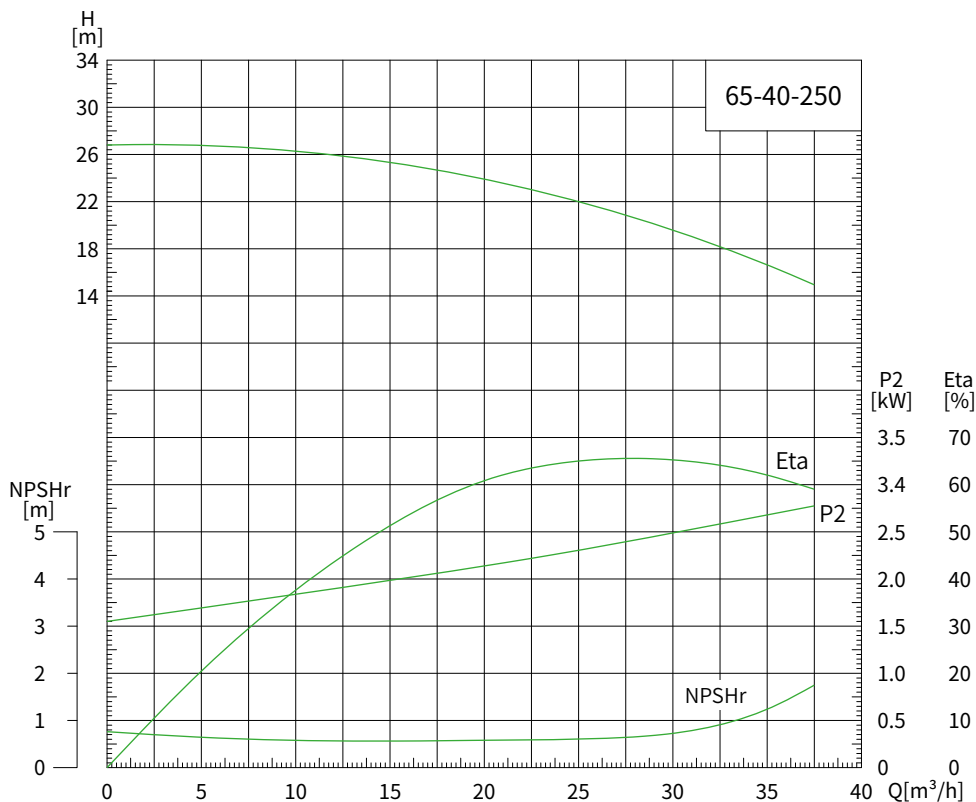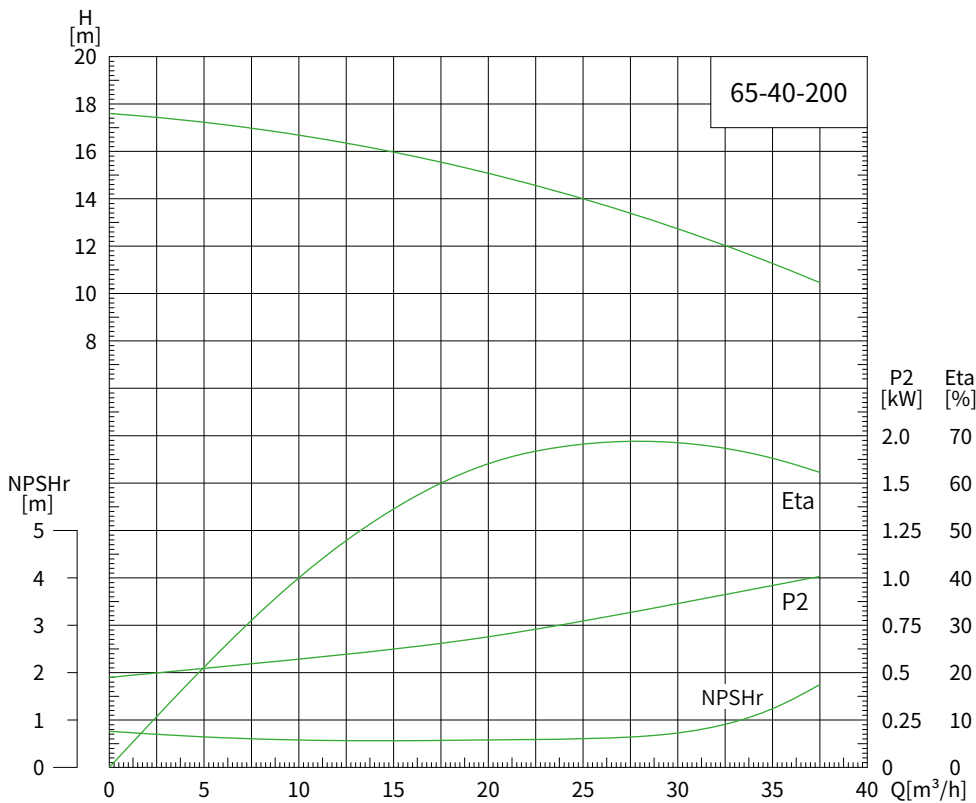



Performance Curves

50Hz 4-pole motor

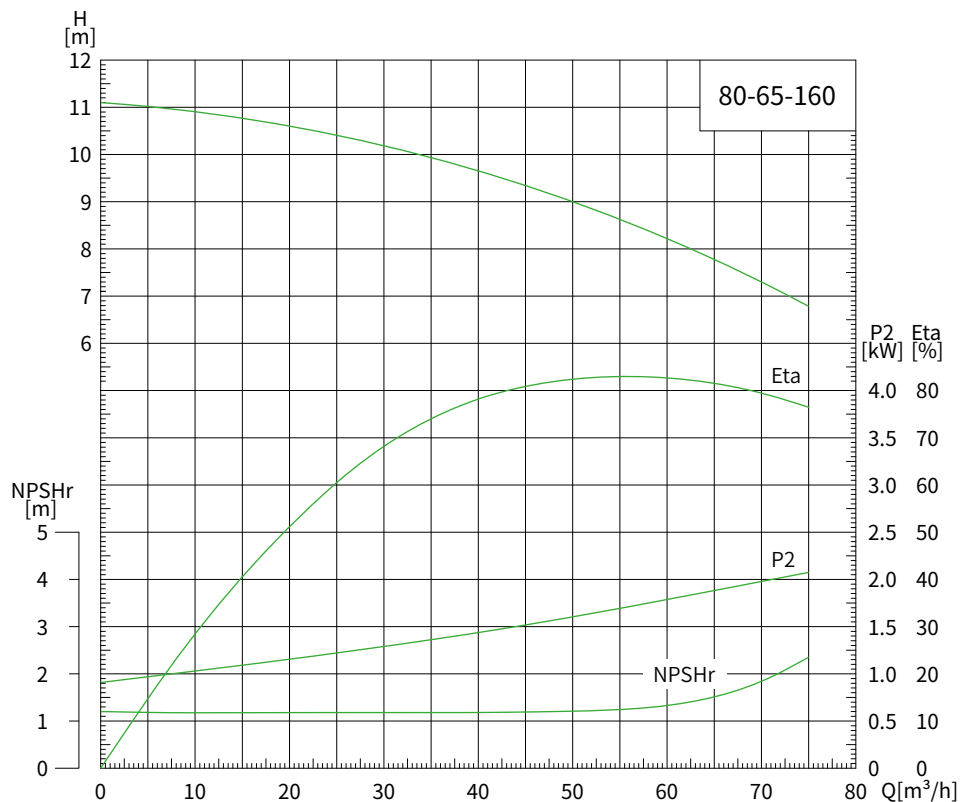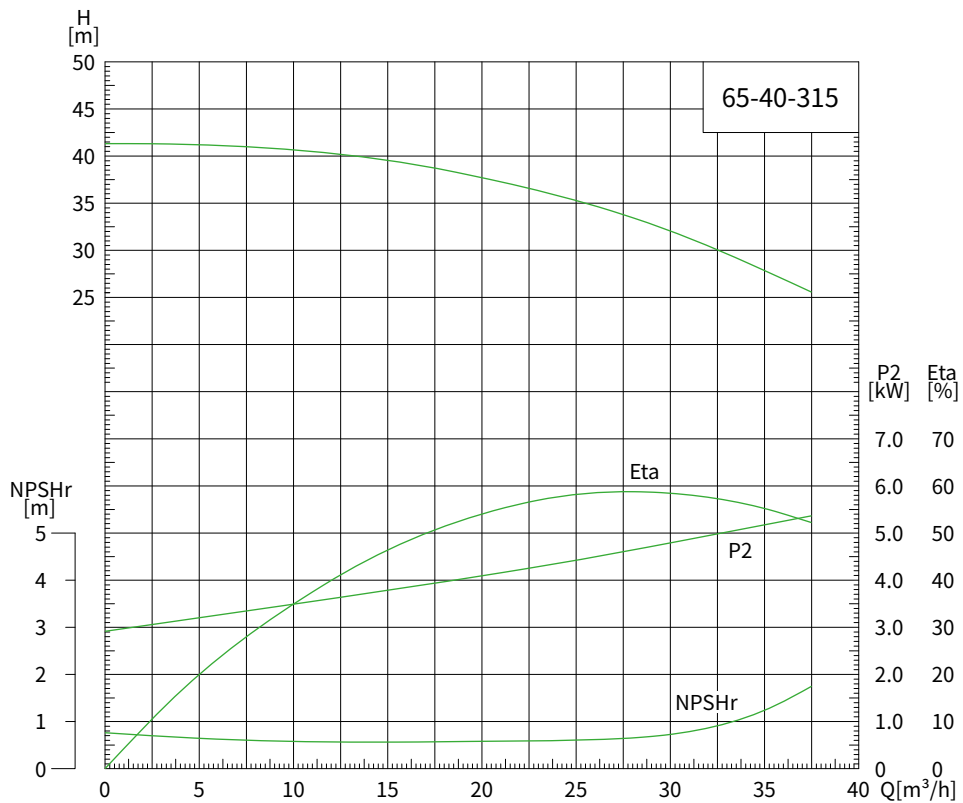



Performance Curves

50Hz 4-pole motor

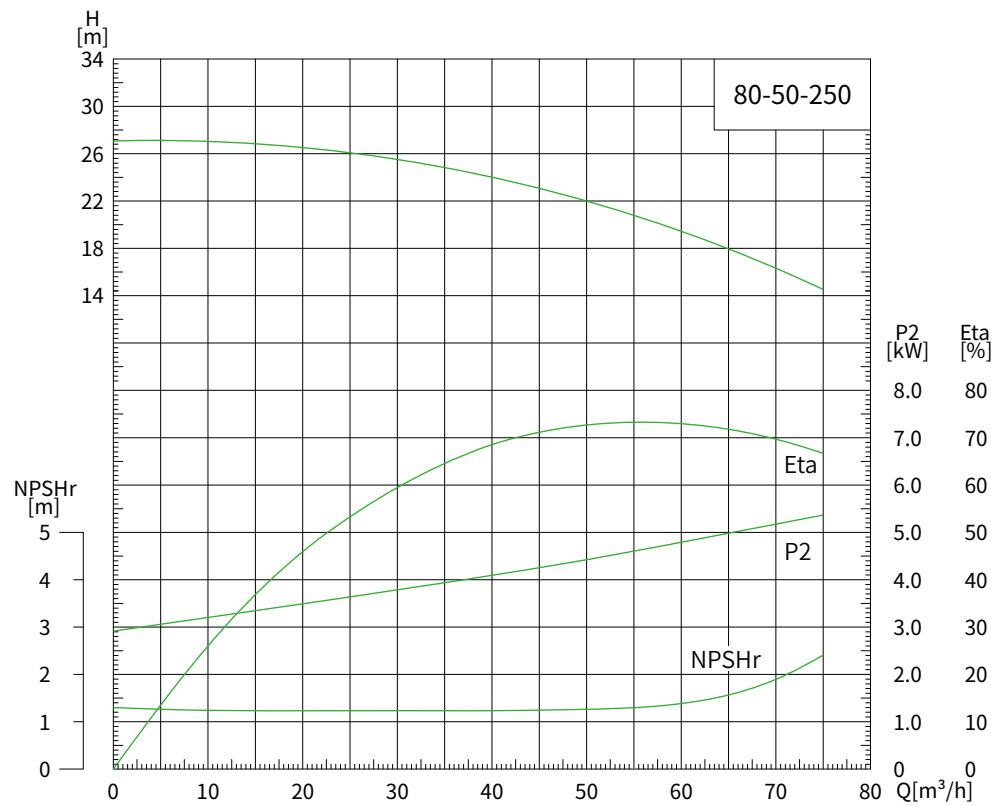
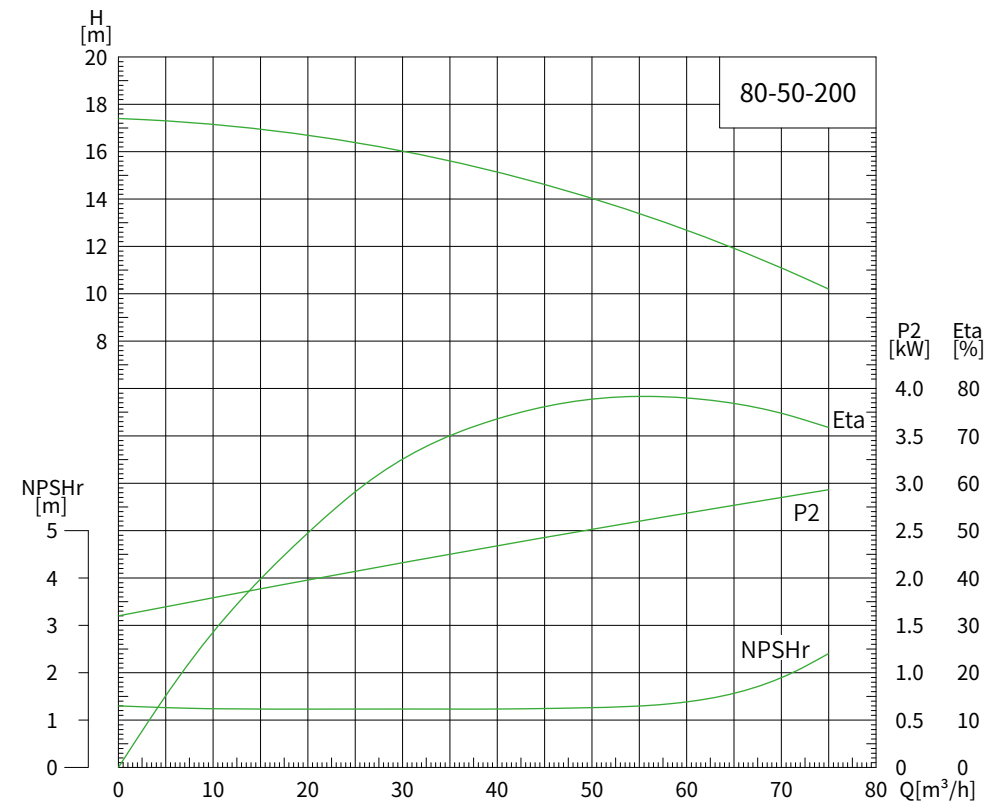


Performance Curves



50Hz 4-pole motor

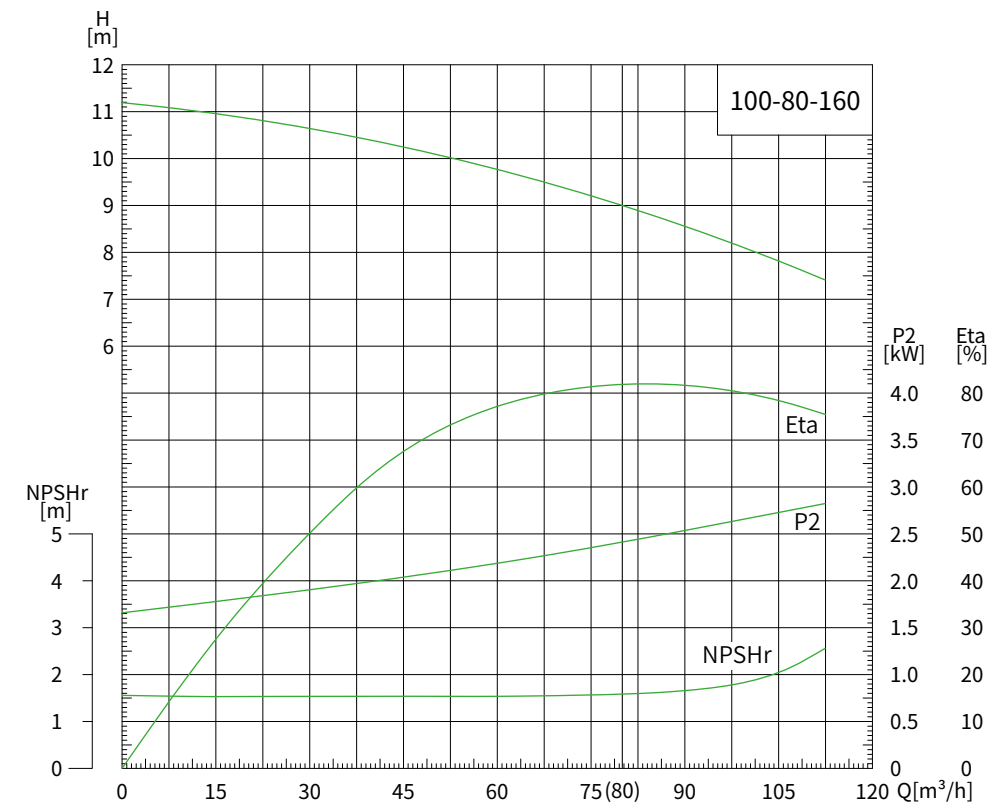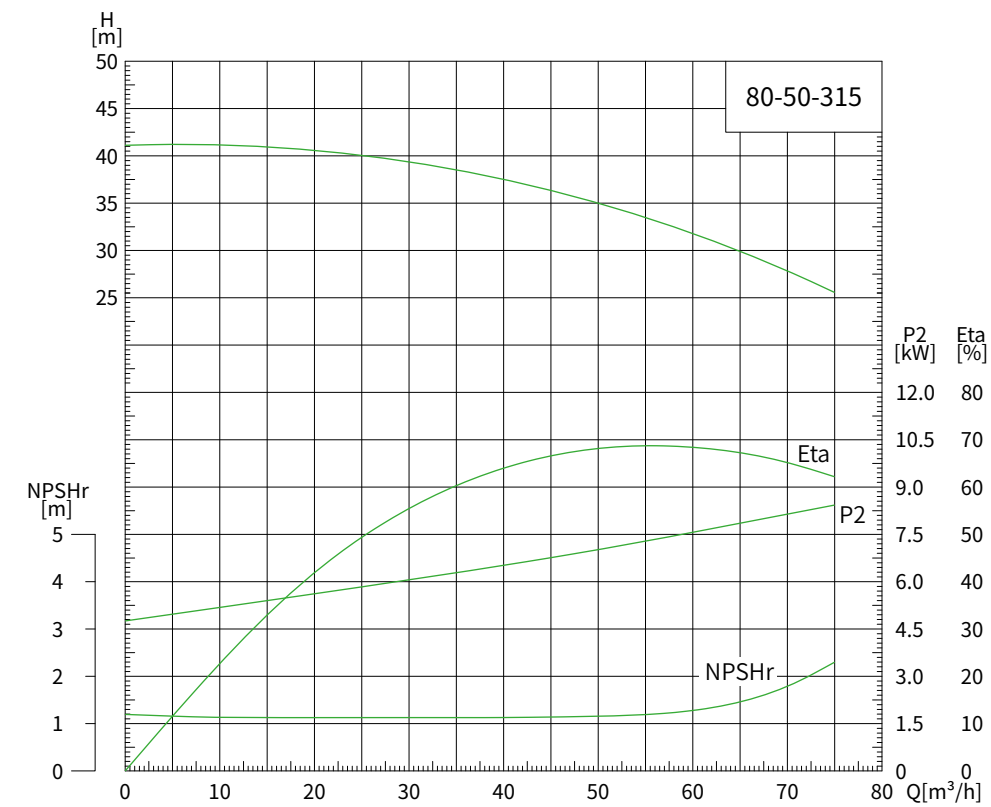


Performance Curves 50Hz 4-pole motor

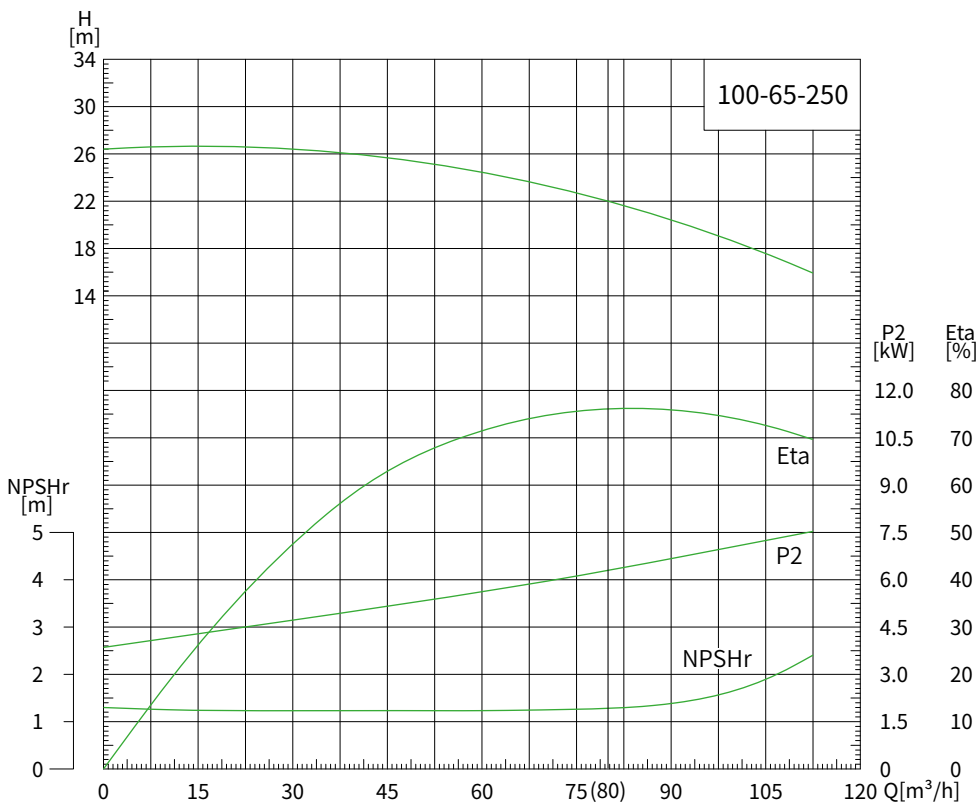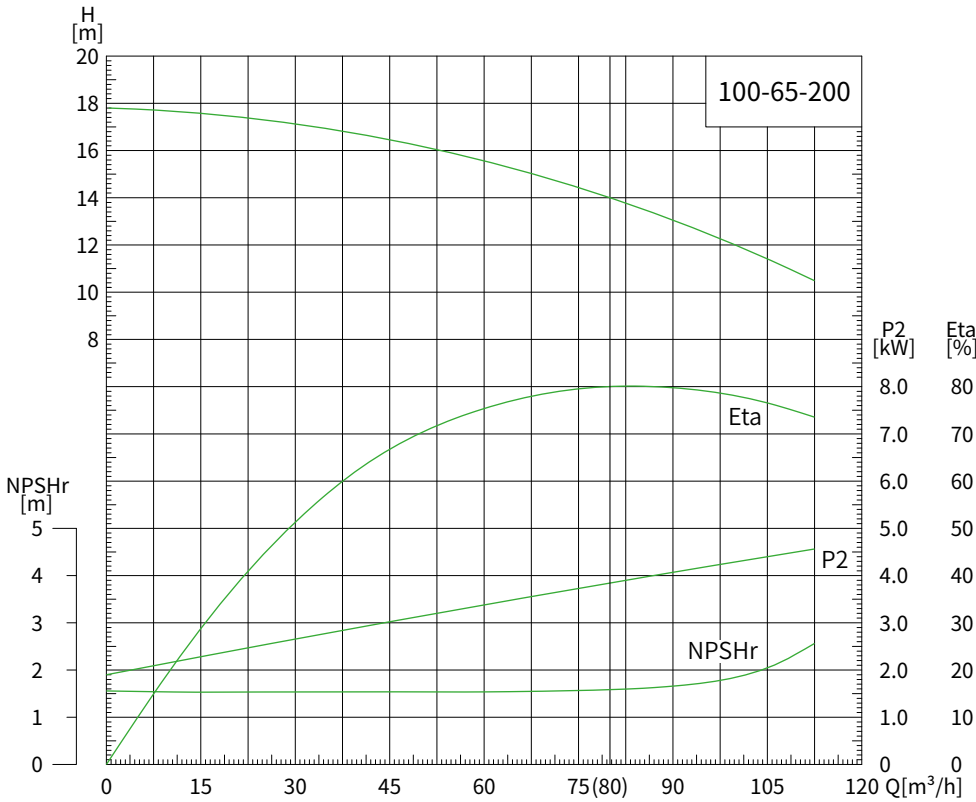




Performance Curves 50Hz 4-pole motor

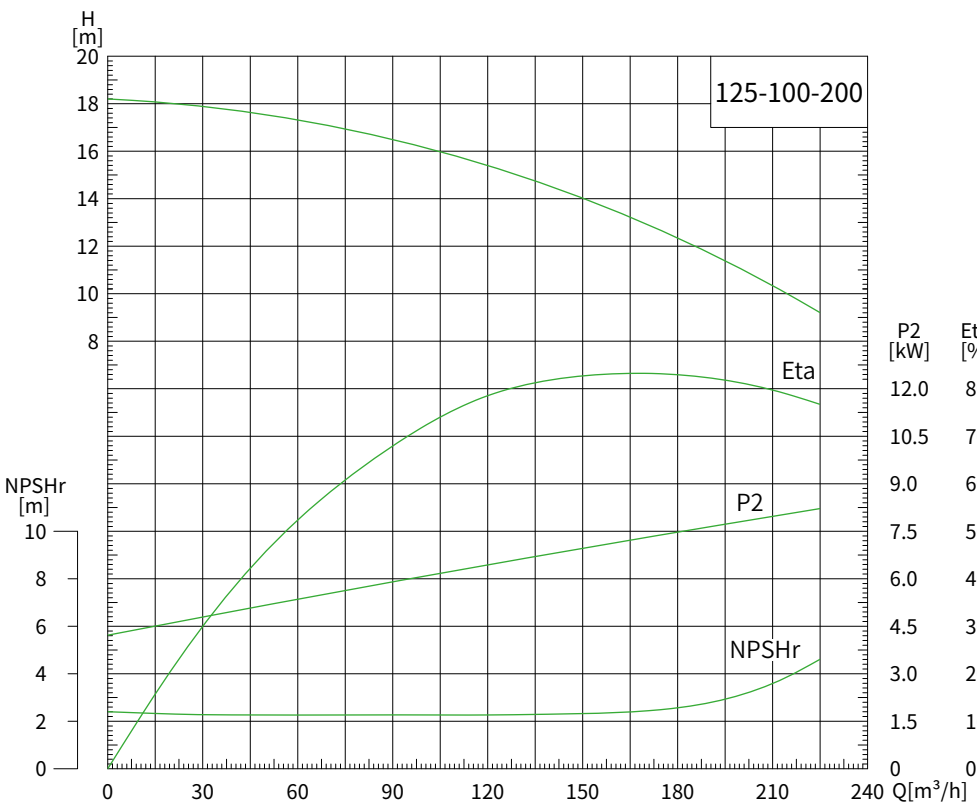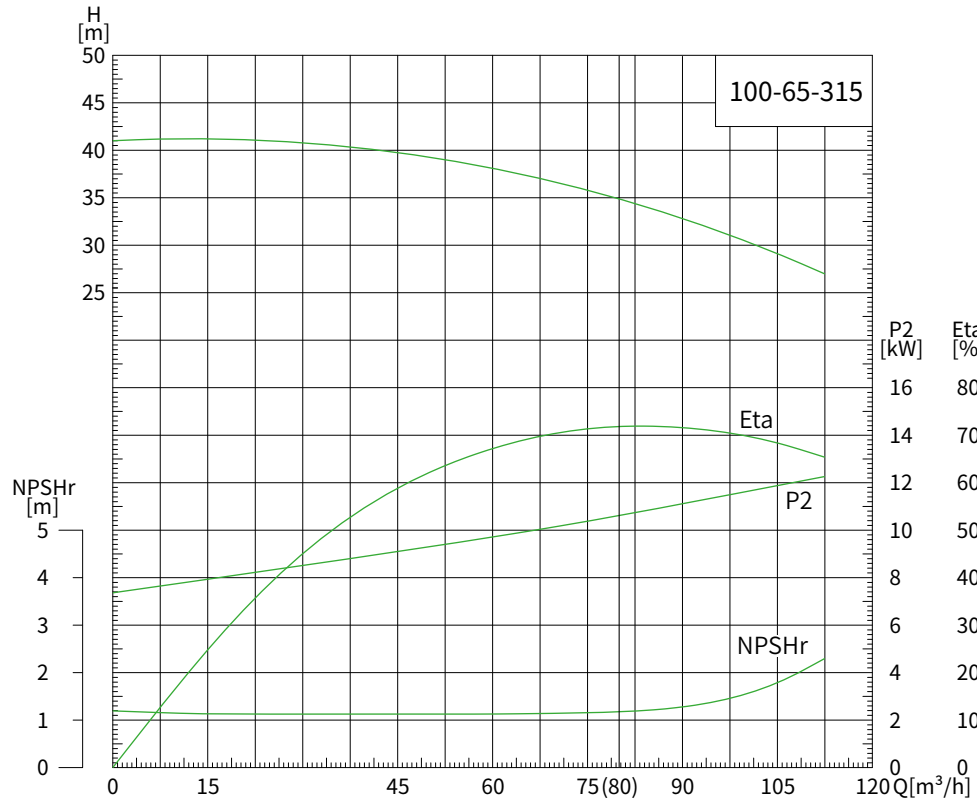



Performance Curves 50Hz 4-pole motor

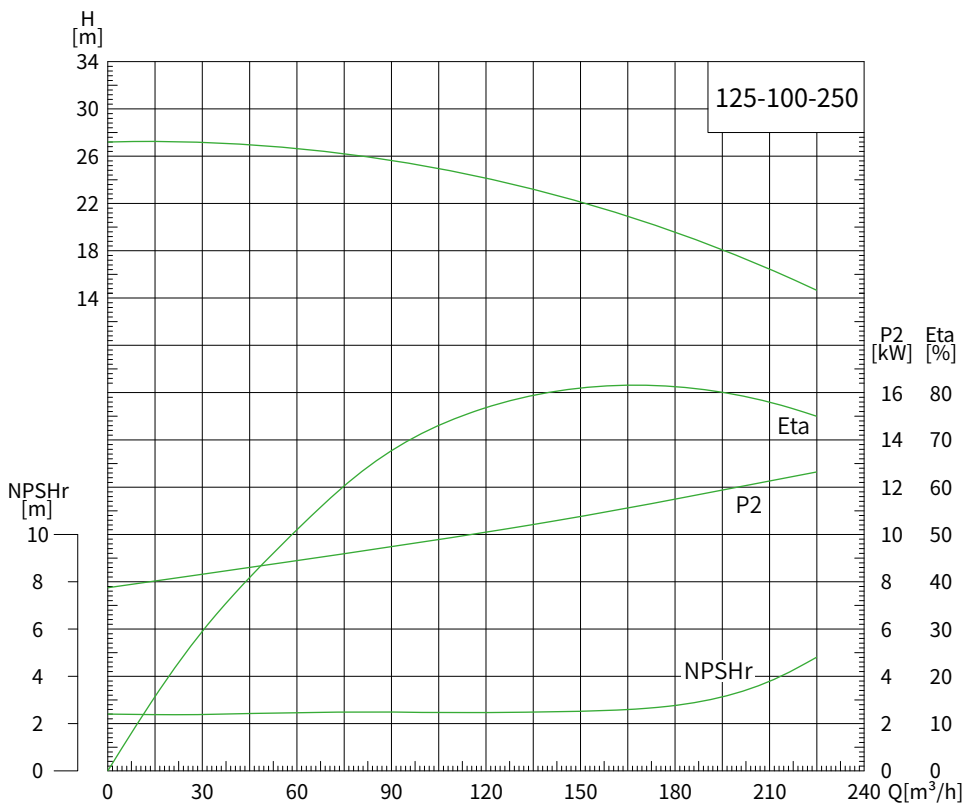



Performance Curves 50Hz 4-pole motor

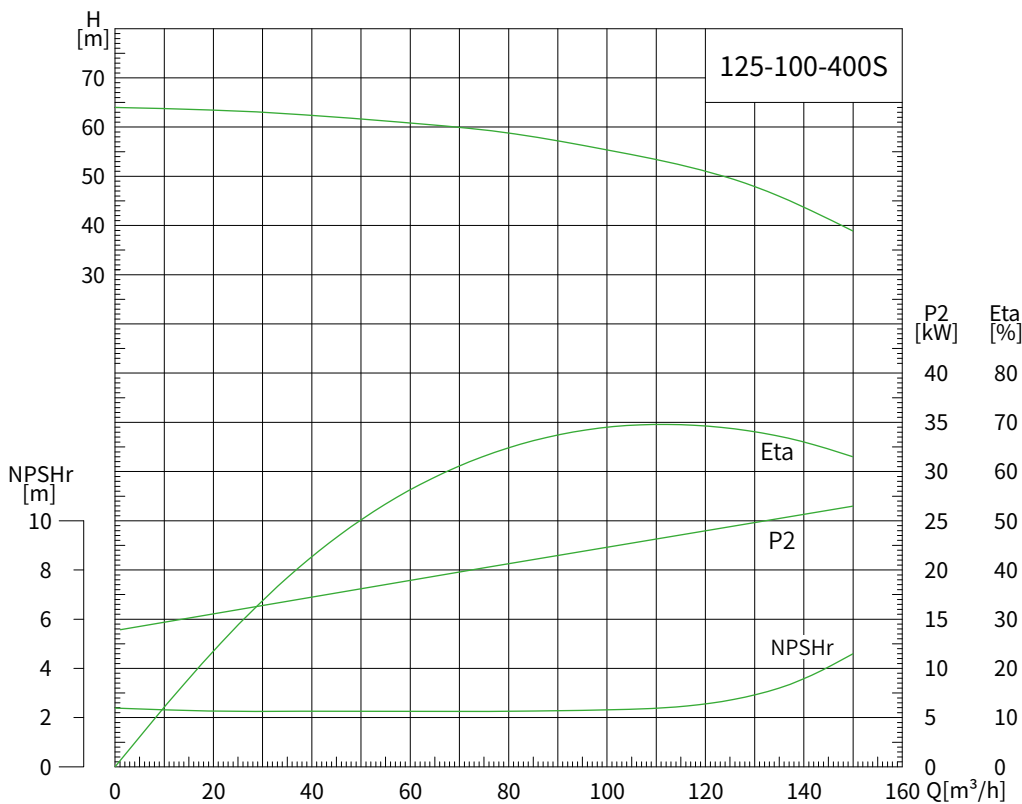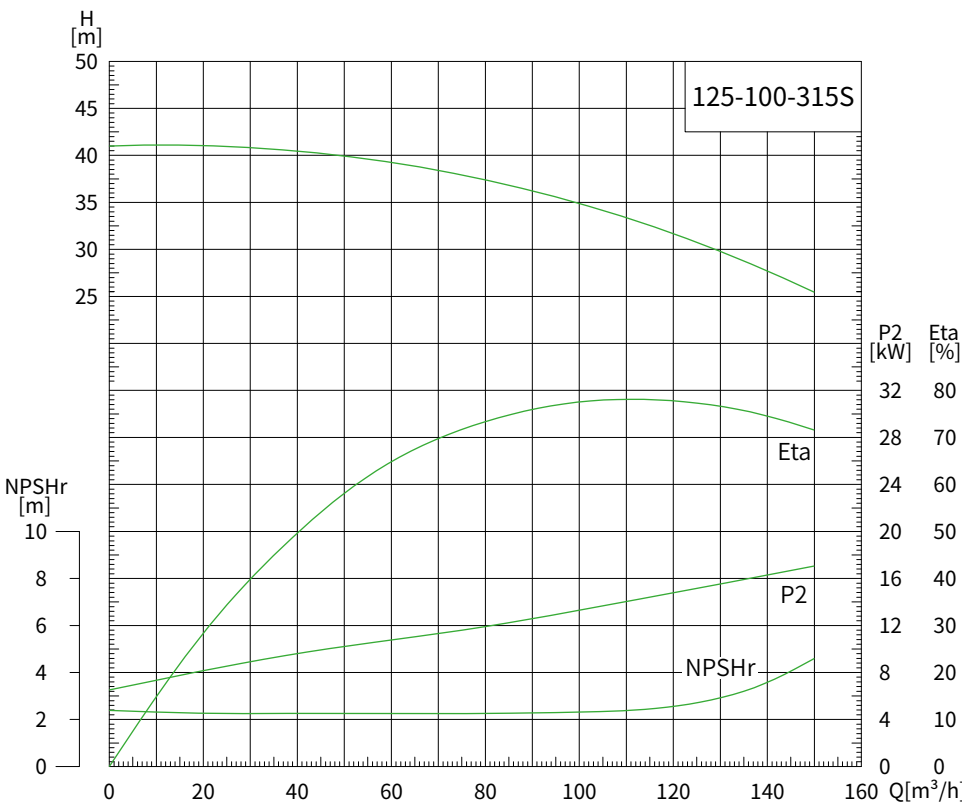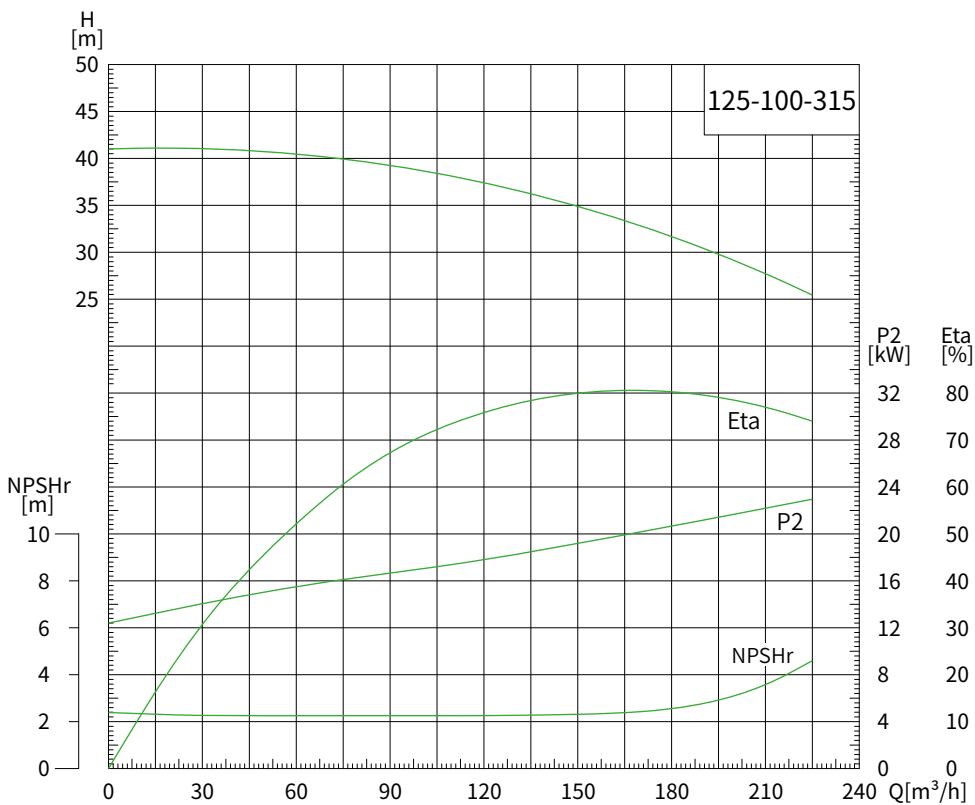



Performance Curves 50Hz 4-pole motor

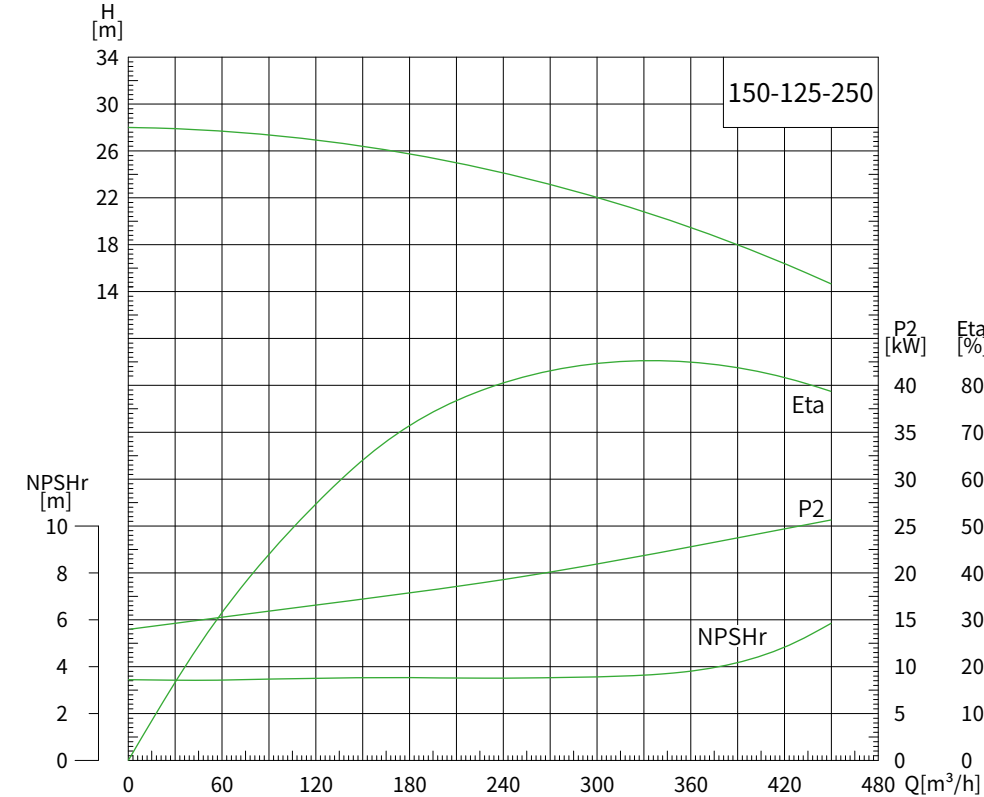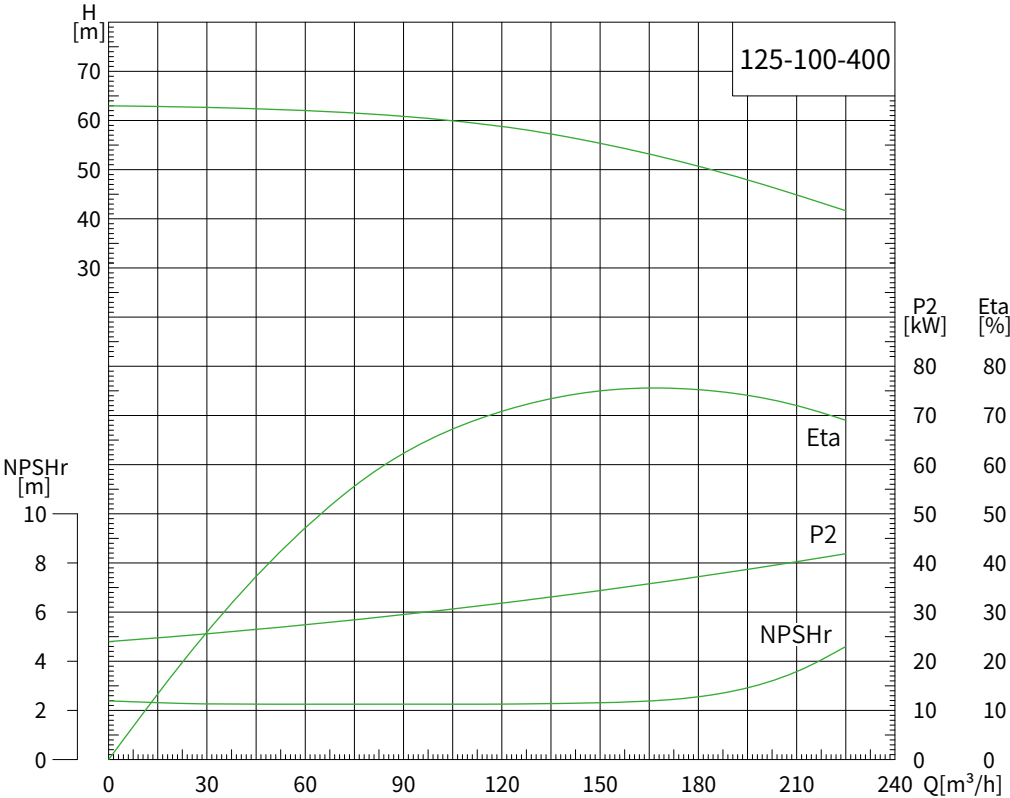



Performance Curves 50Hz 4-pole motor

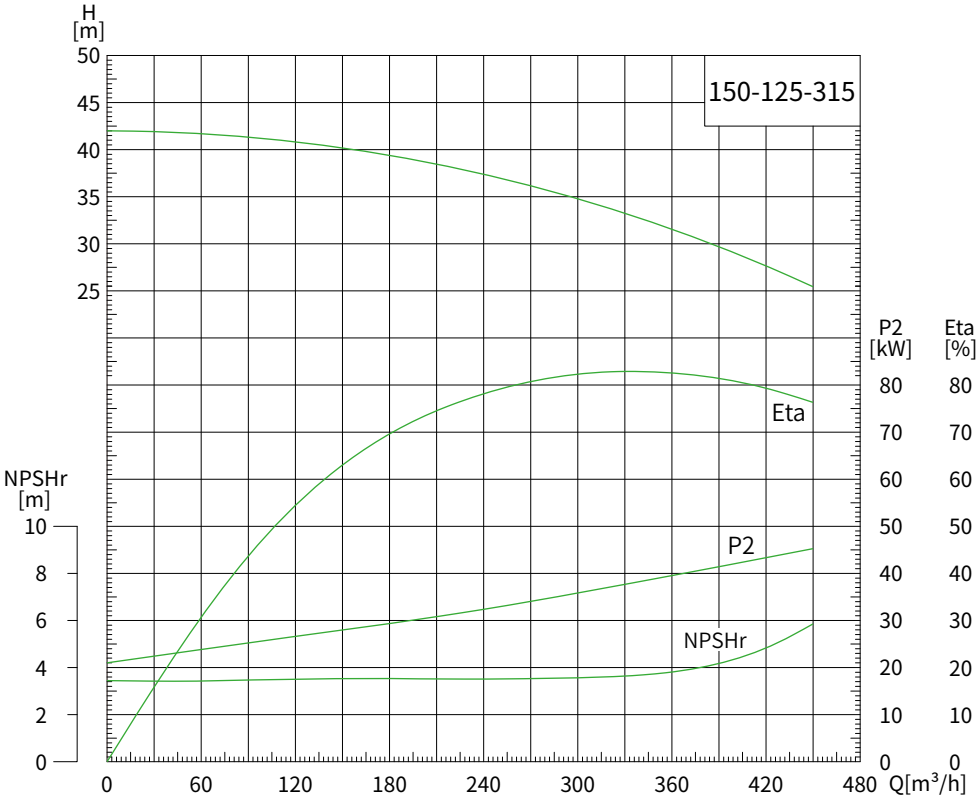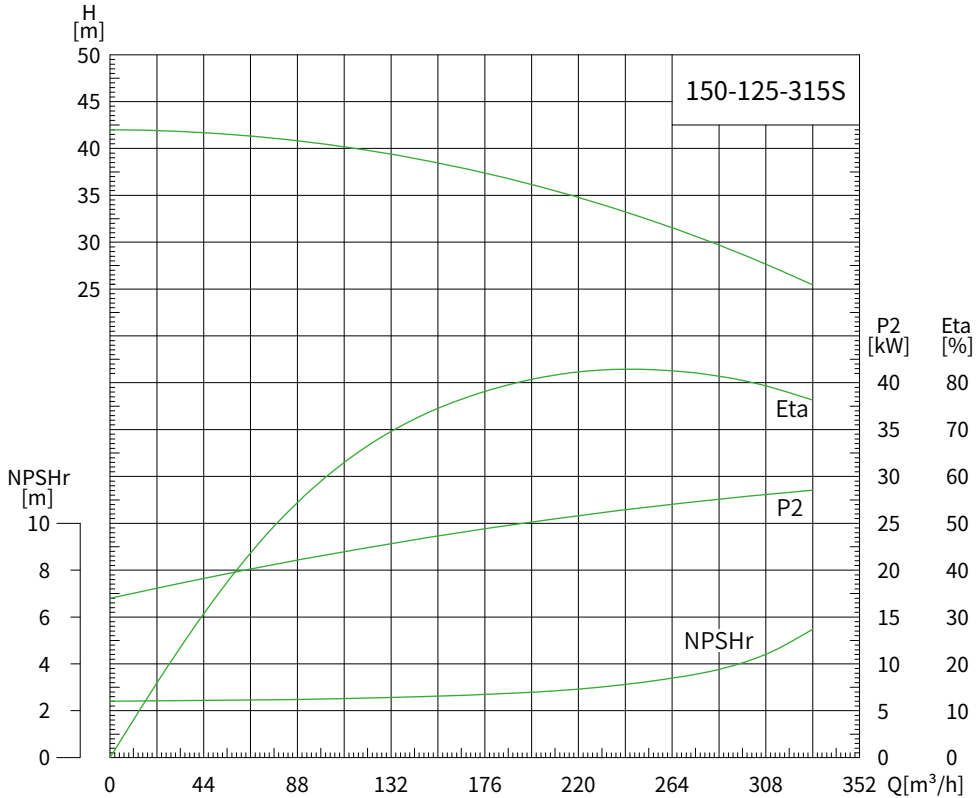



Performance Curves 50Hz 4-pole motor

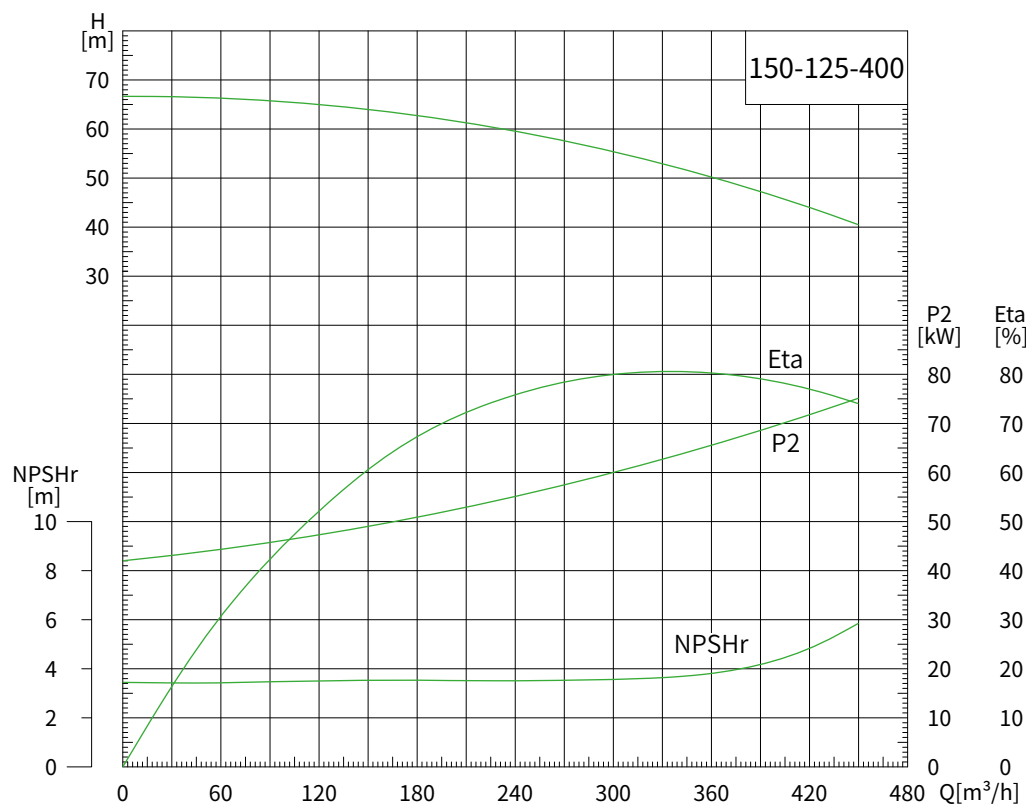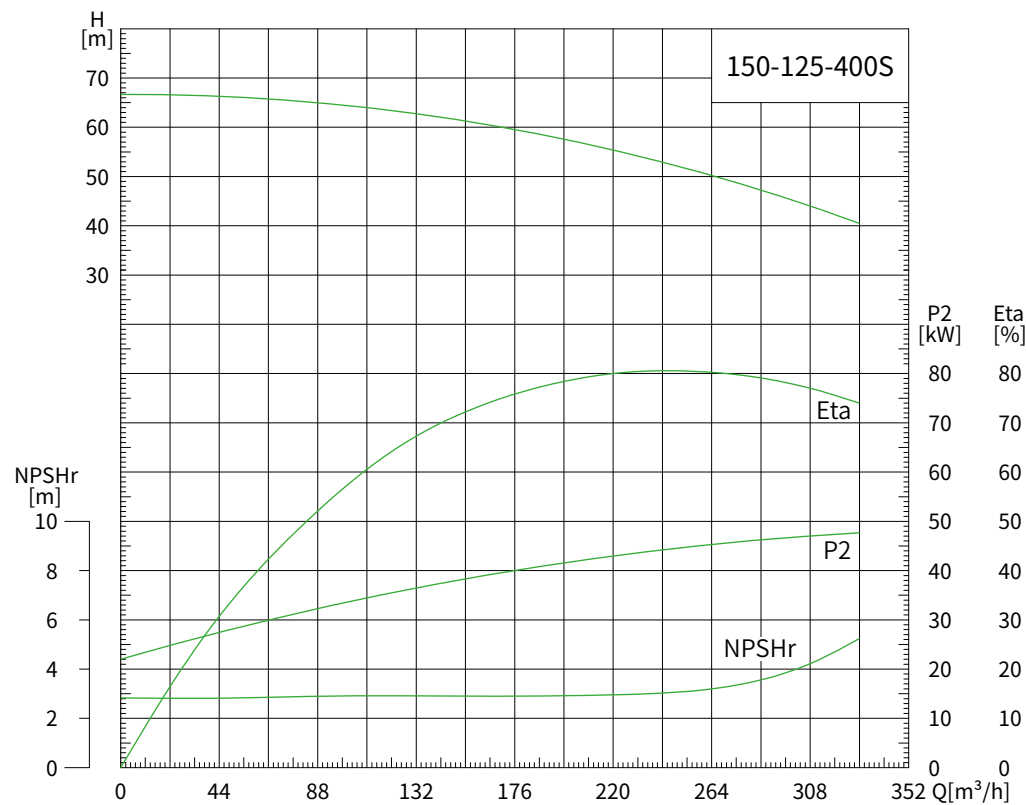



Performance Curves 50Hz 4-pole motor

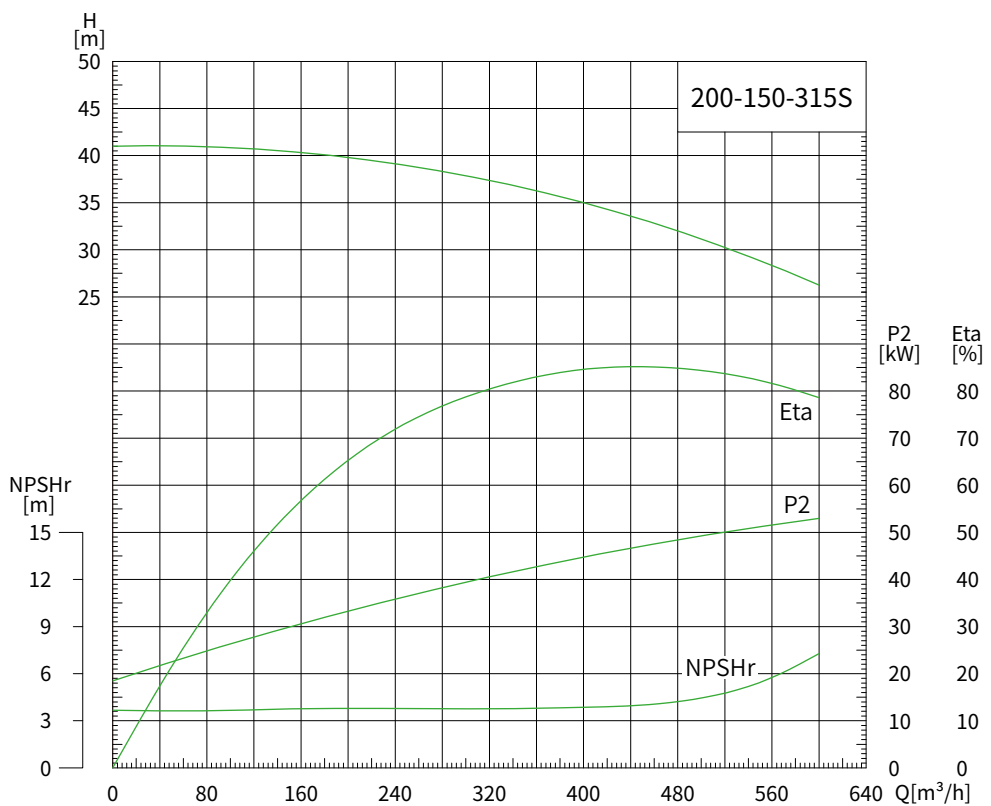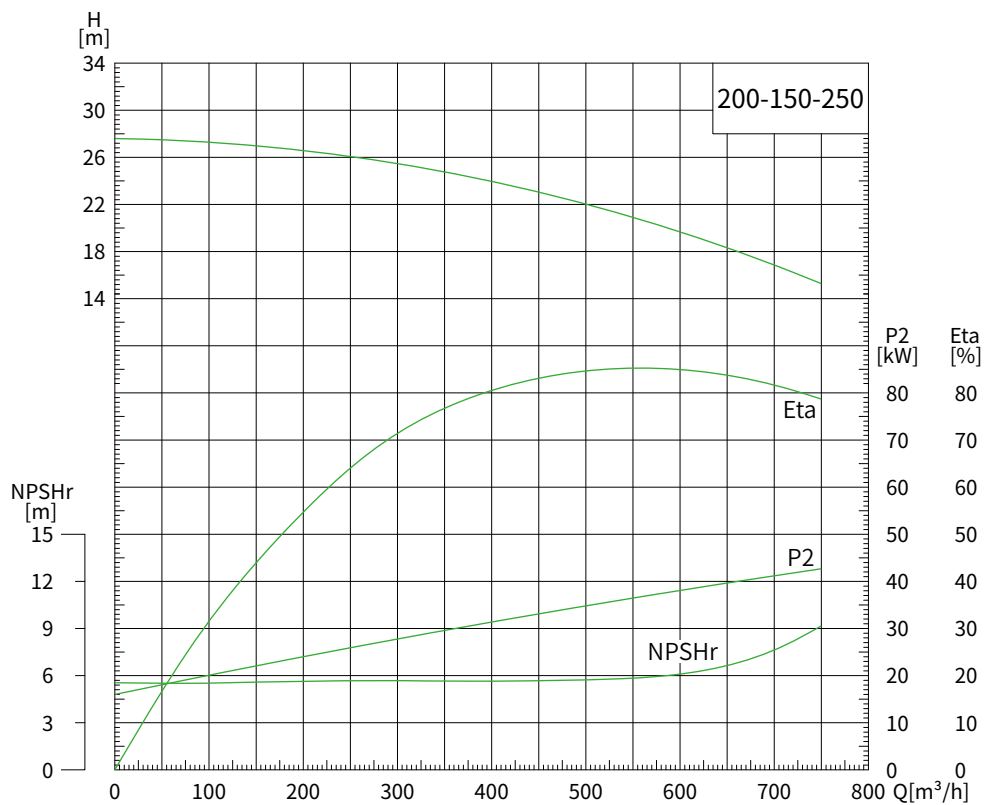



Performance Curves 50Hz 4-pole motor

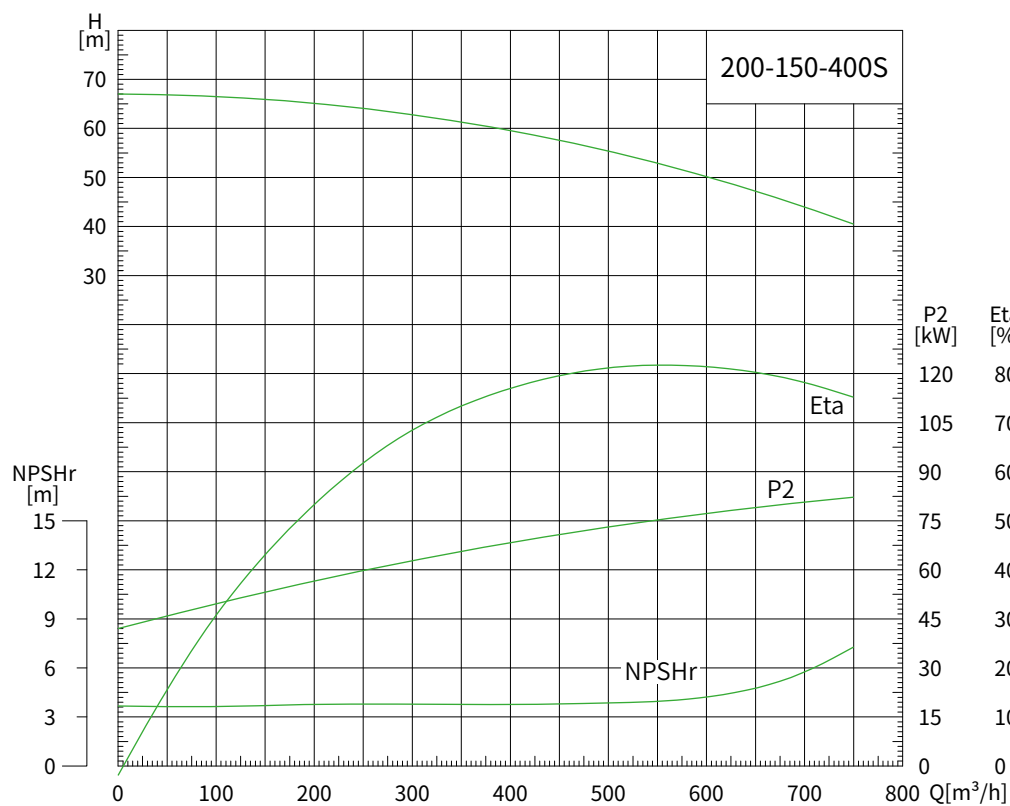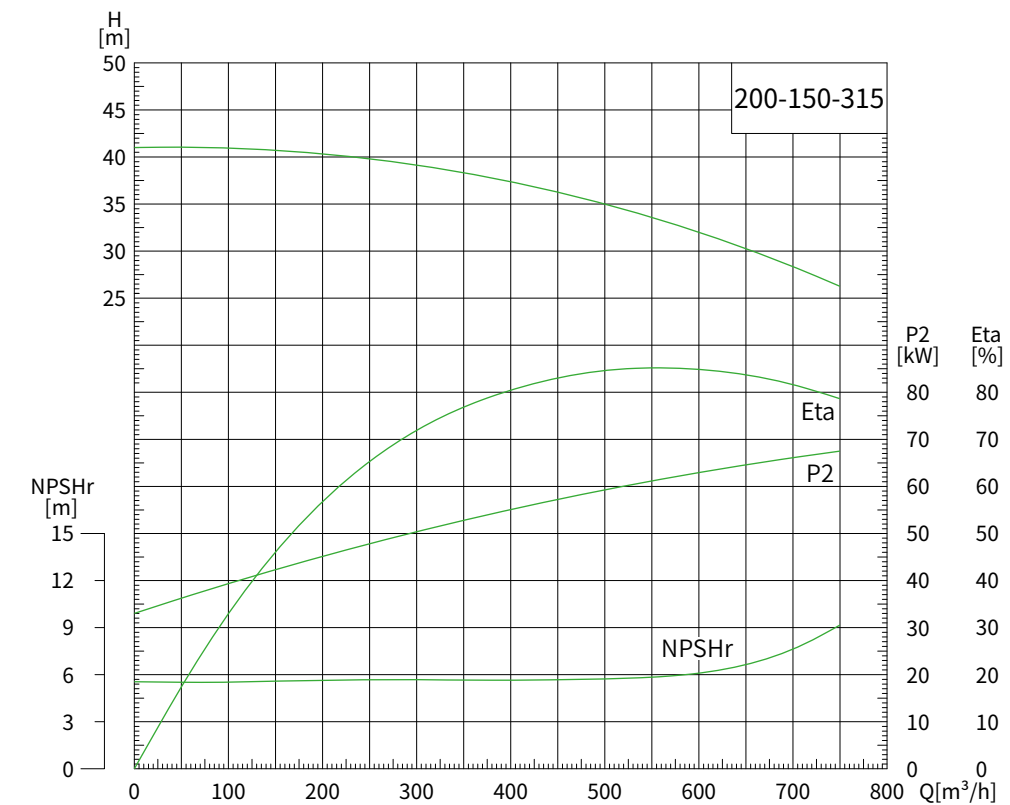



Performance Curves 50Hz 4-pole motor

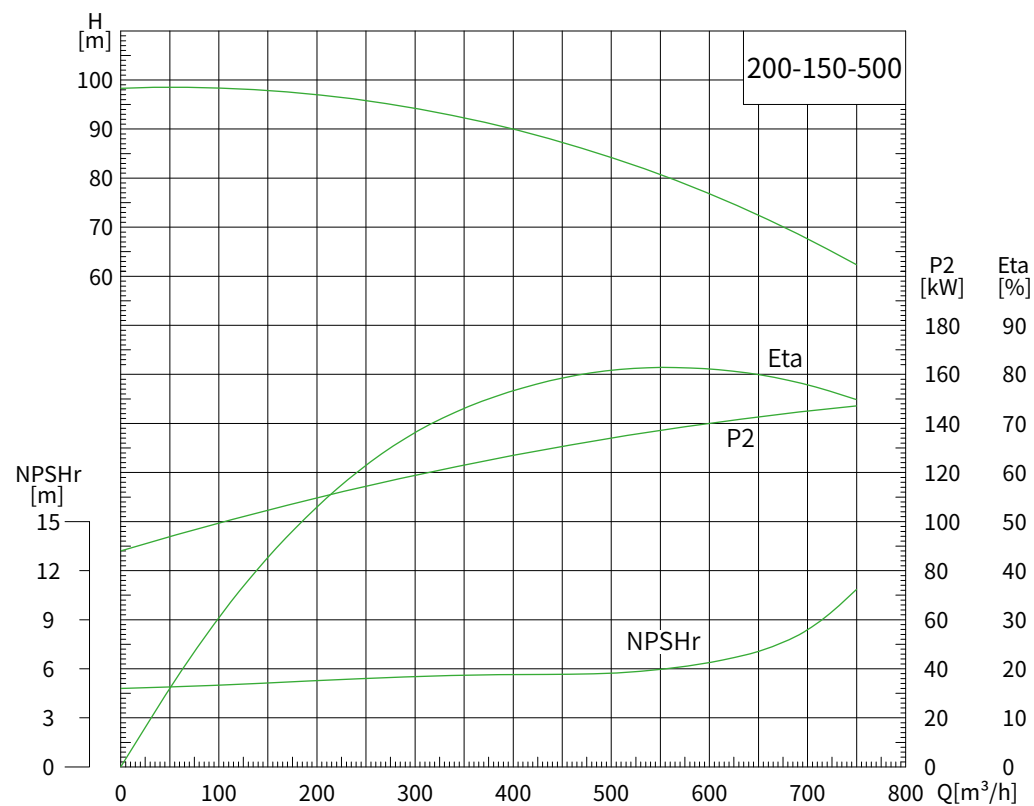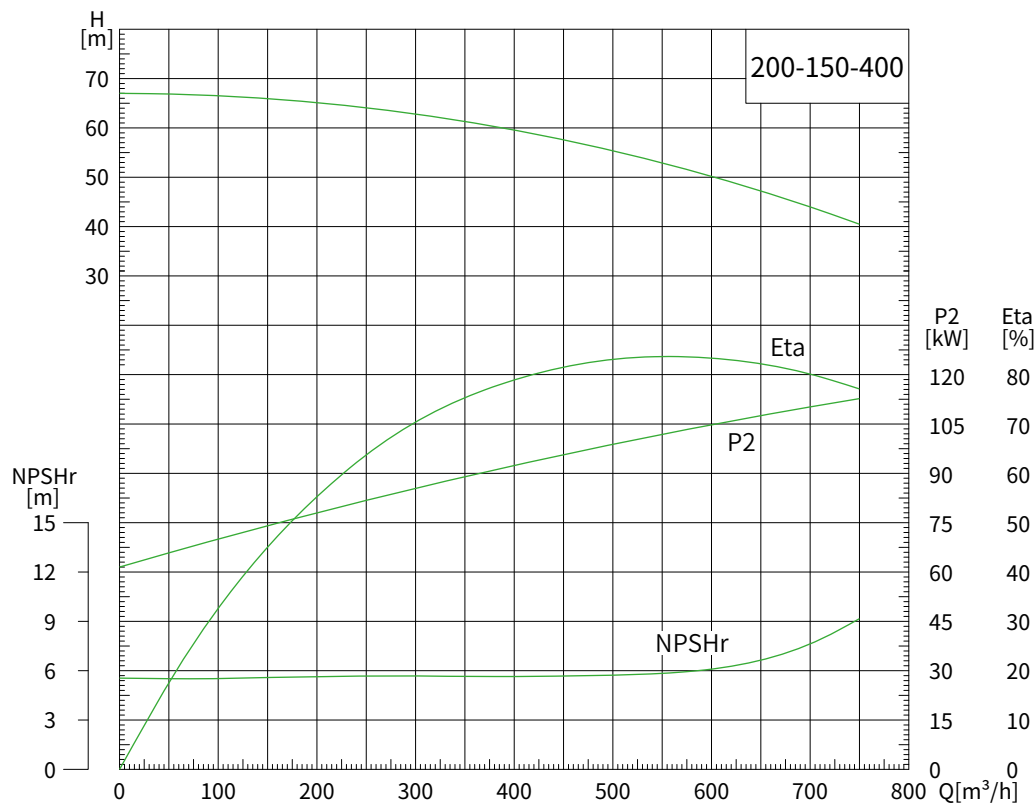



Performance Curves 50Hz 4-pole motor

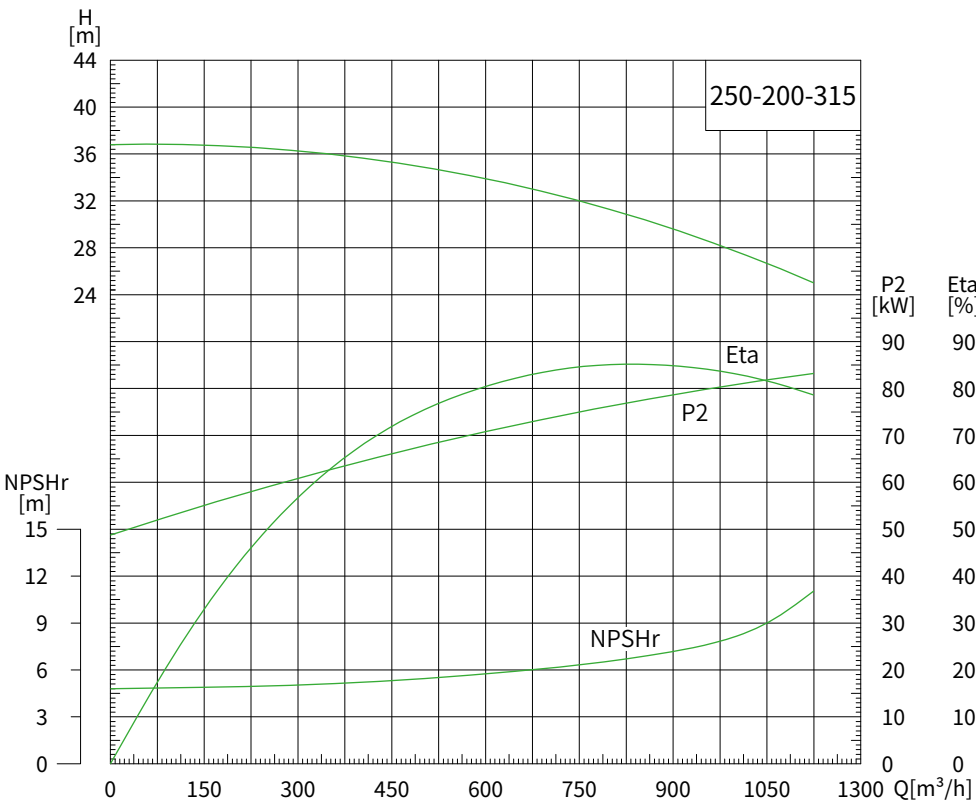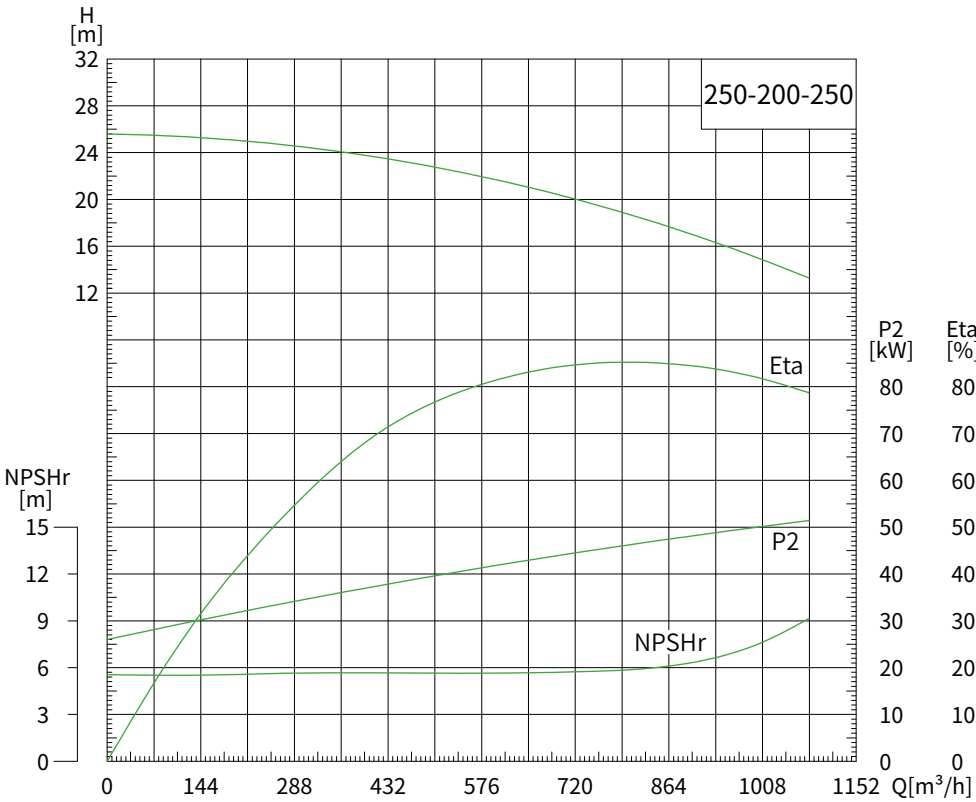



Performance Curves 50Hz 4-pole motor

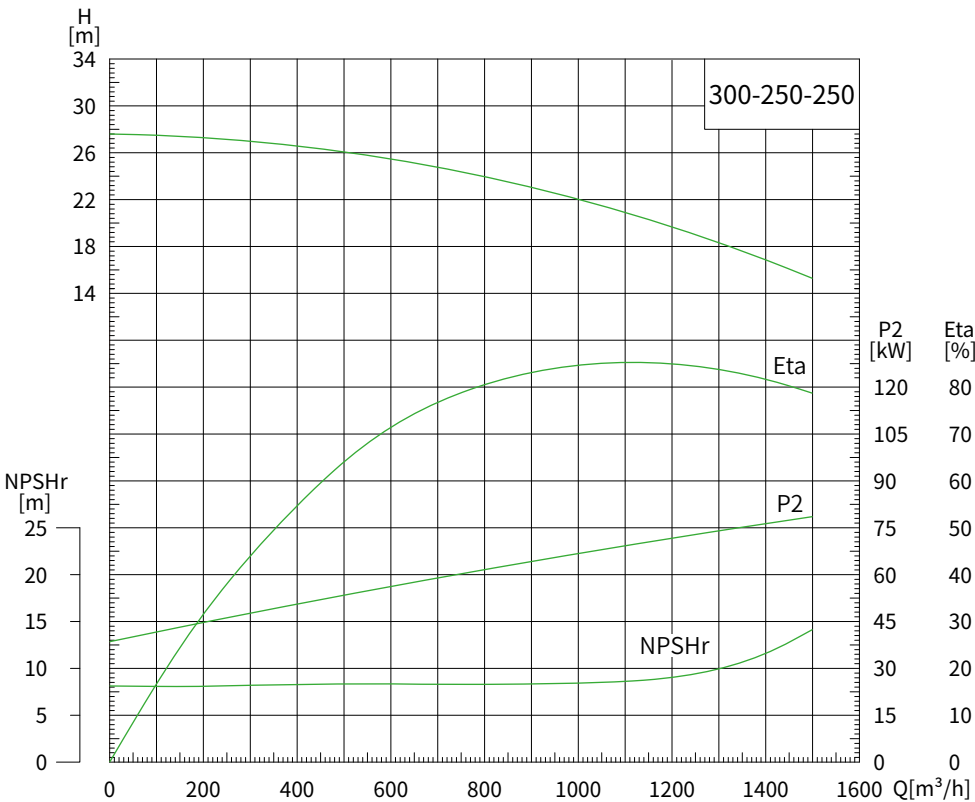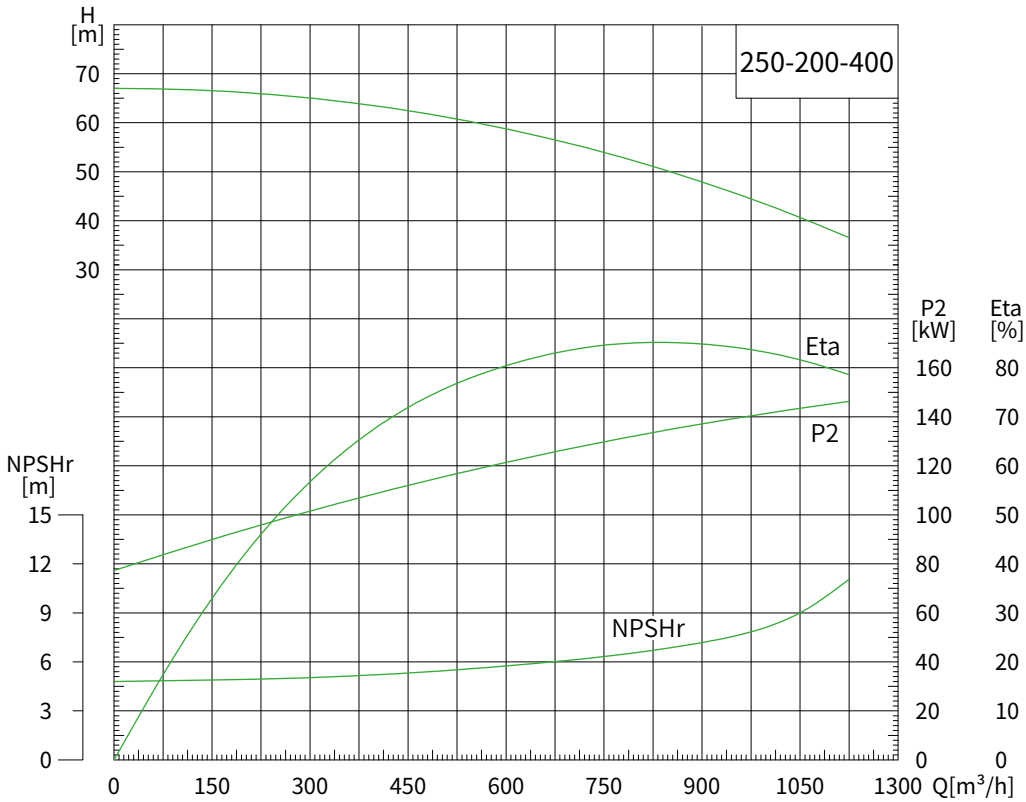



Performance Curves 50Hz 4-pole motor

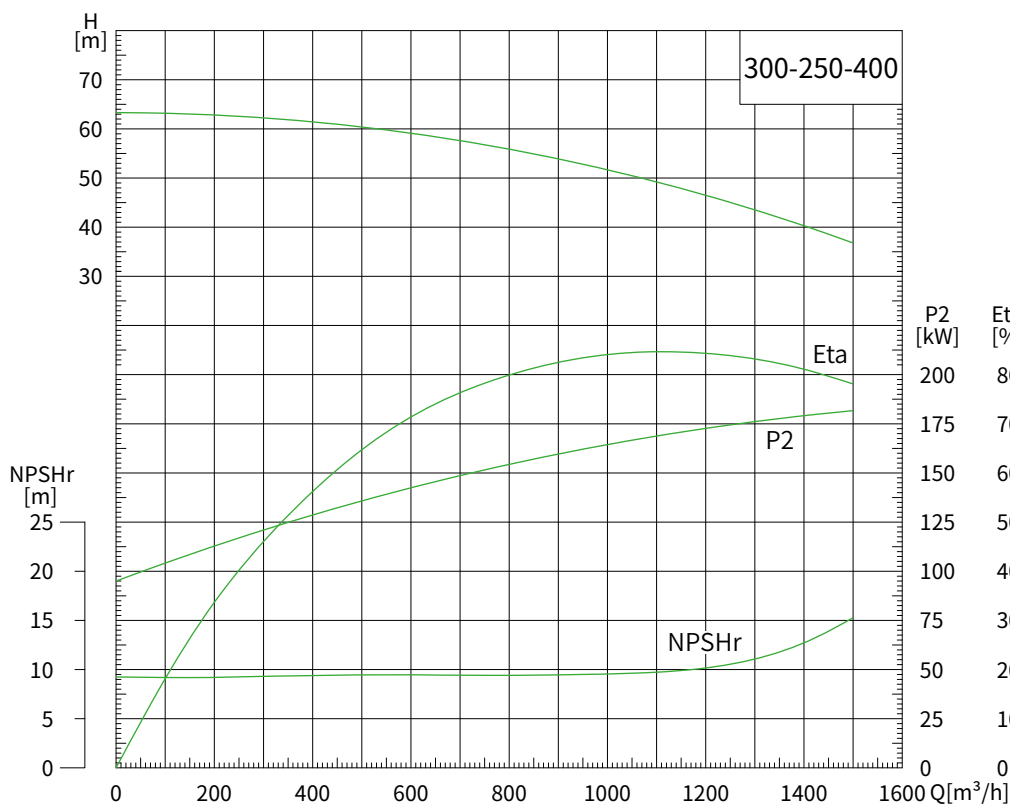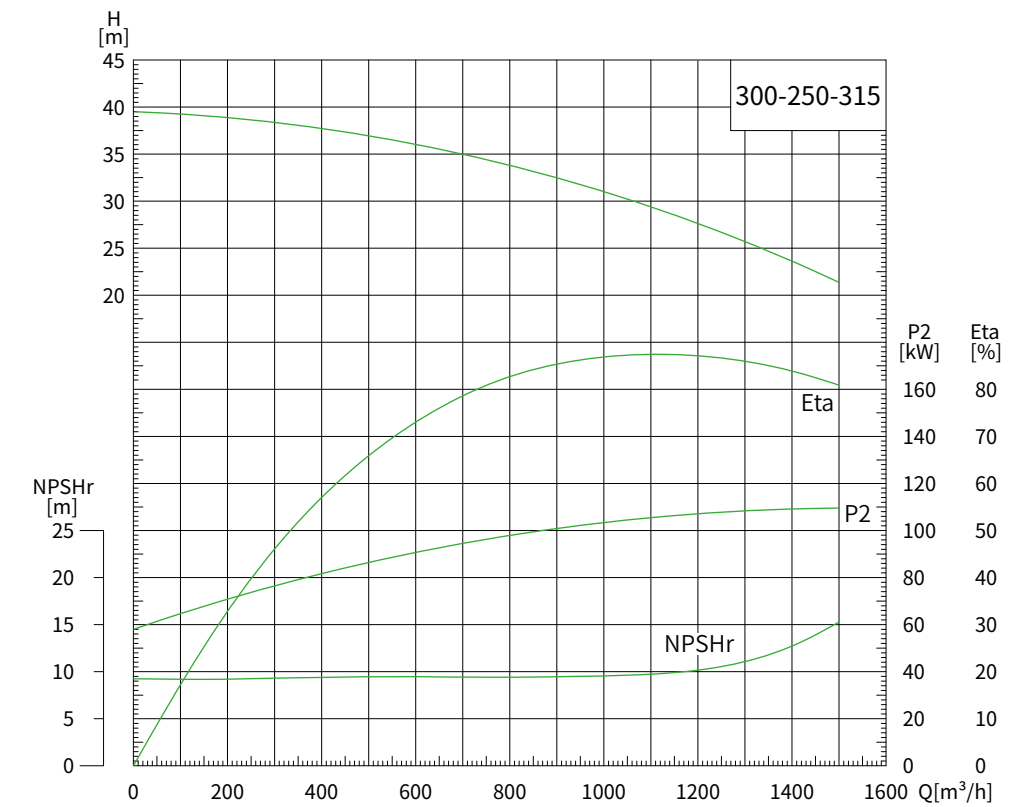



Performance Curves 50Hz 2-pole motor

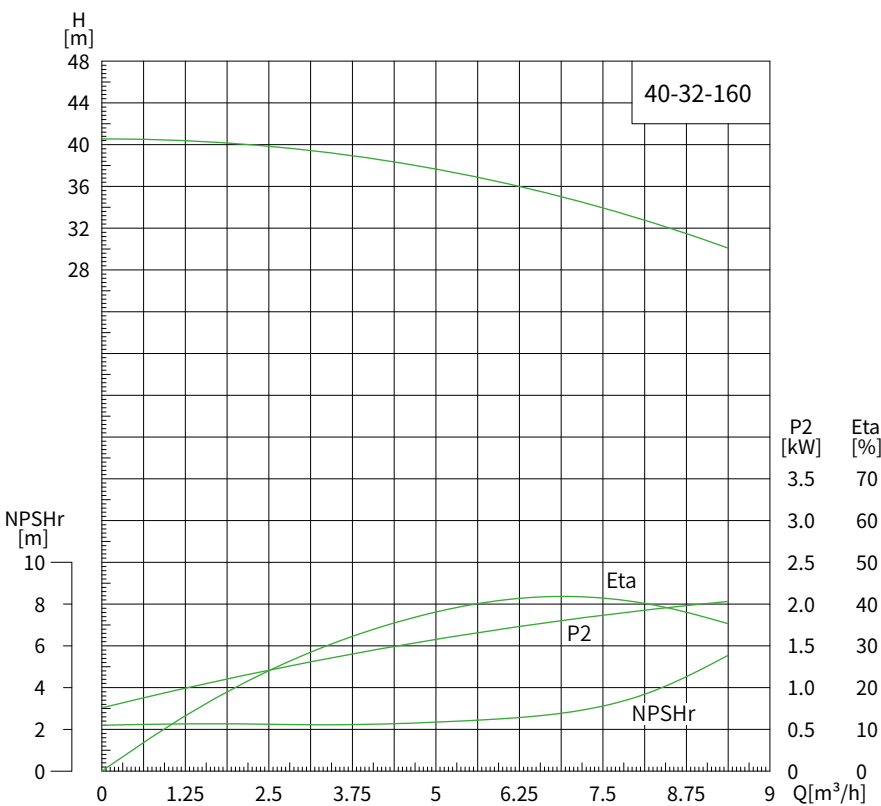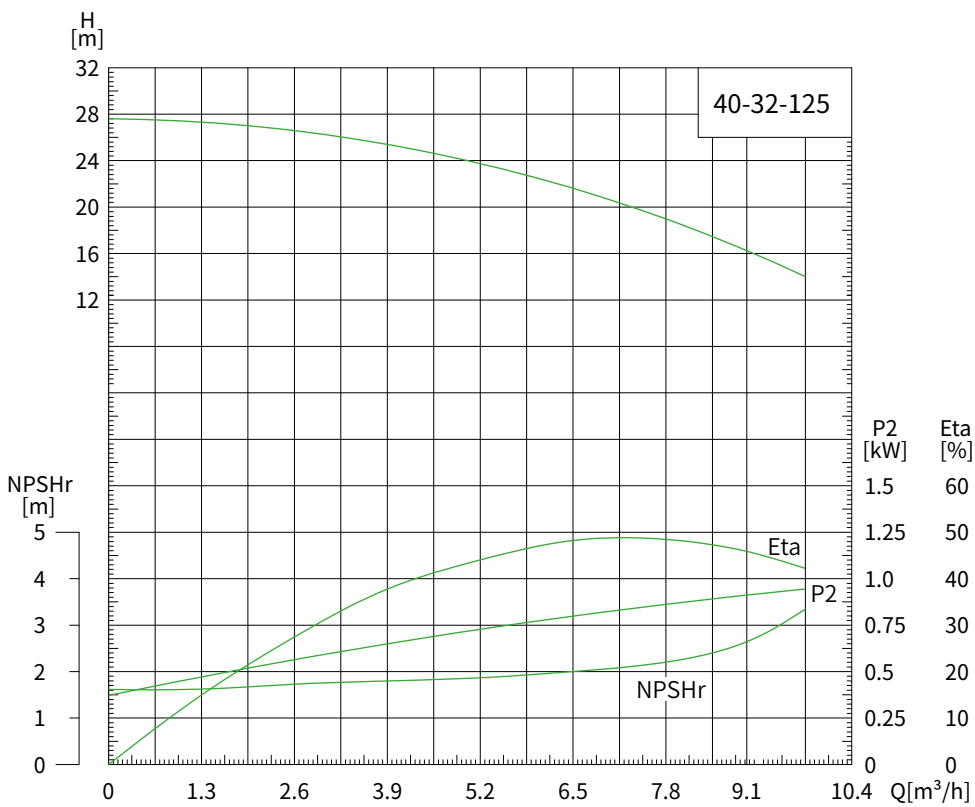

Performance Curves 50Hz 2-pole motor

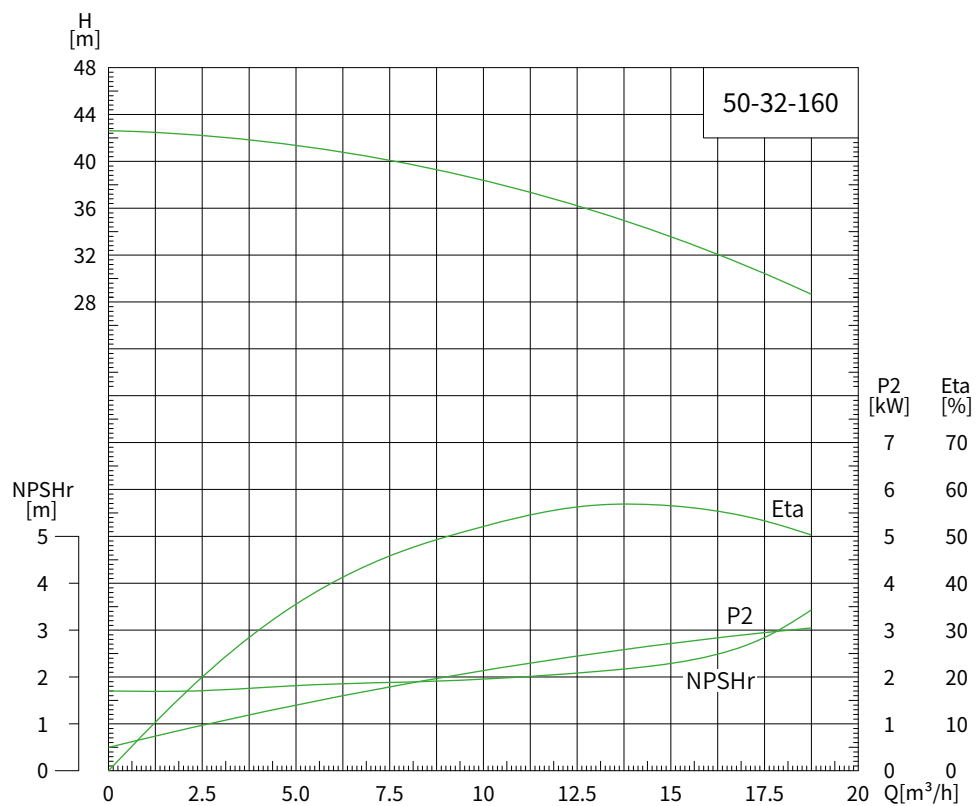
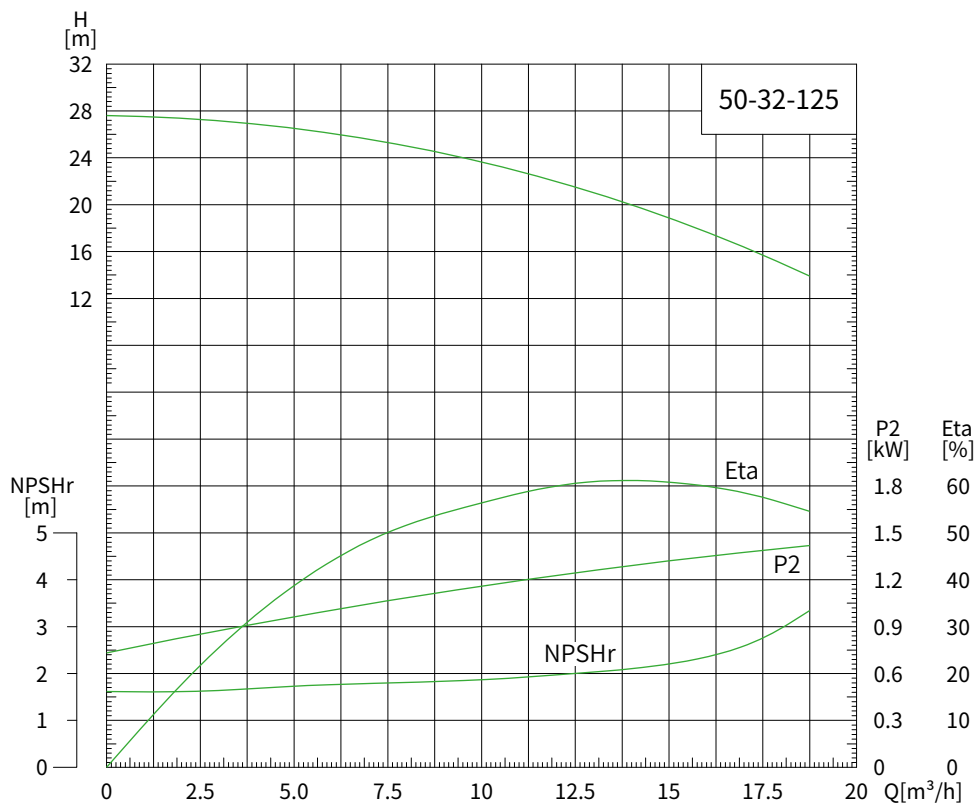


Performance Curves 50Hz 2-pole motor

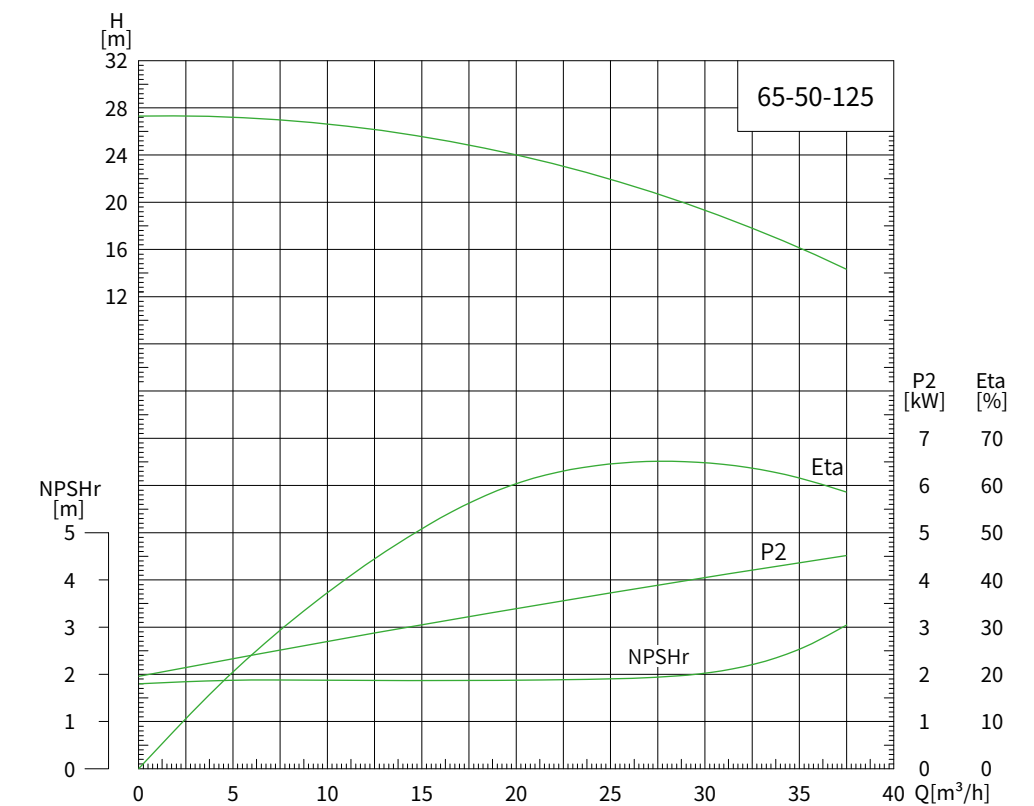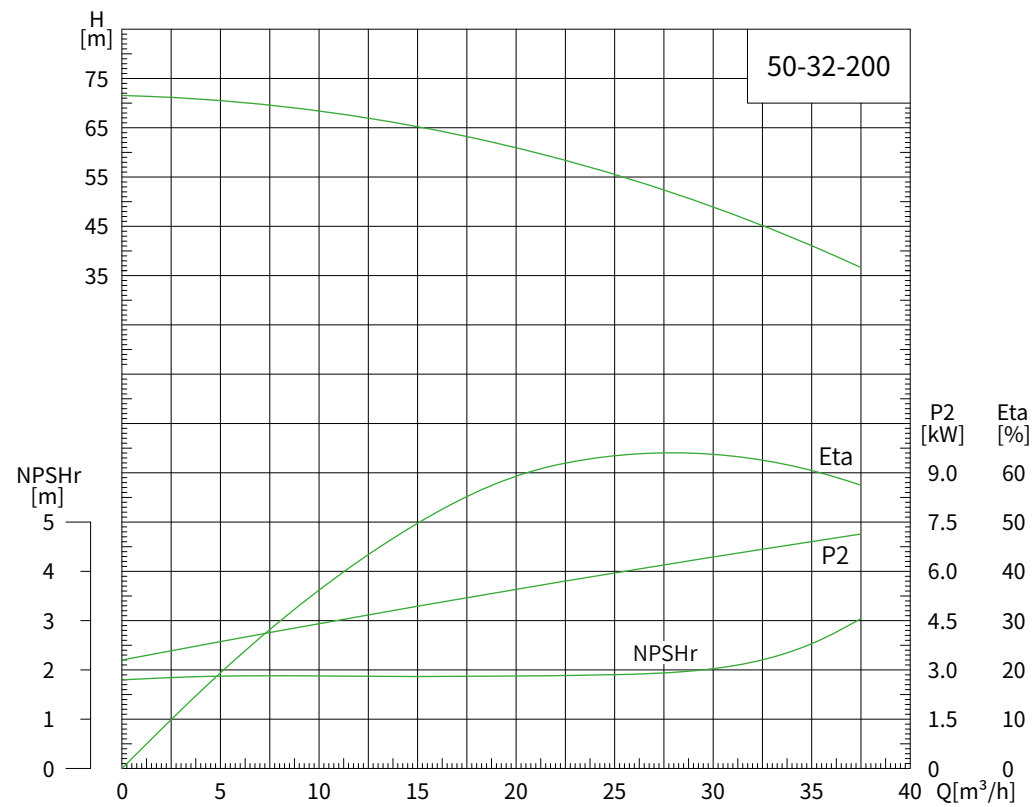



Performance Curves

50Hz 2-pole motor

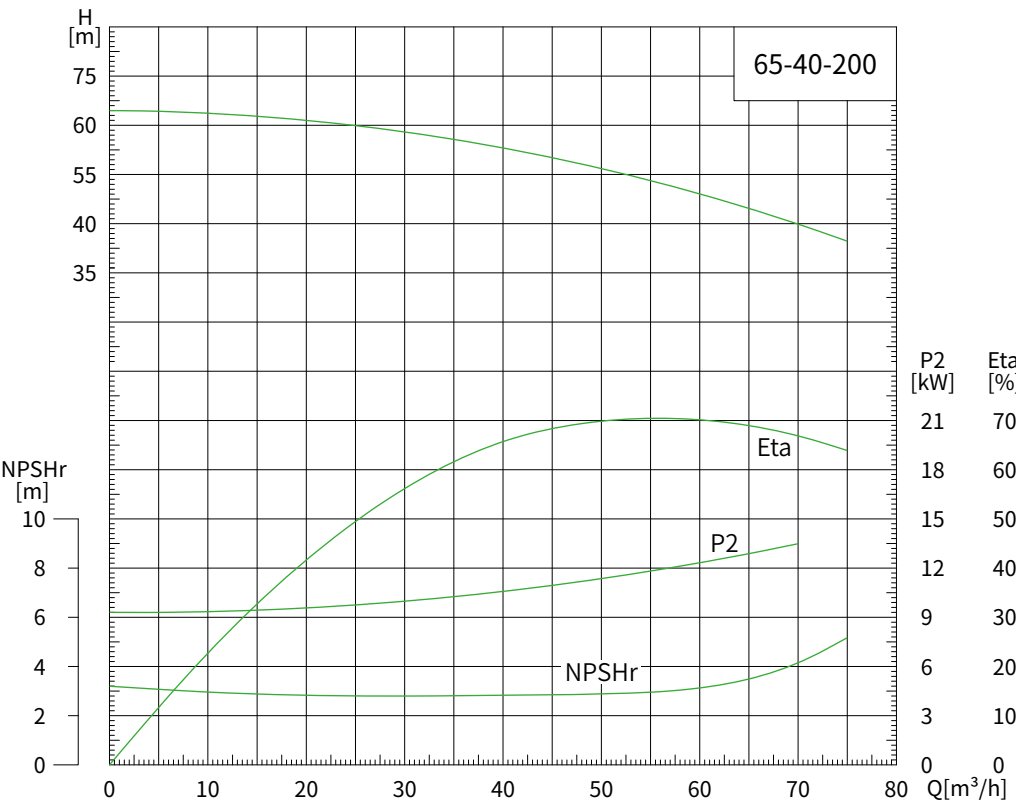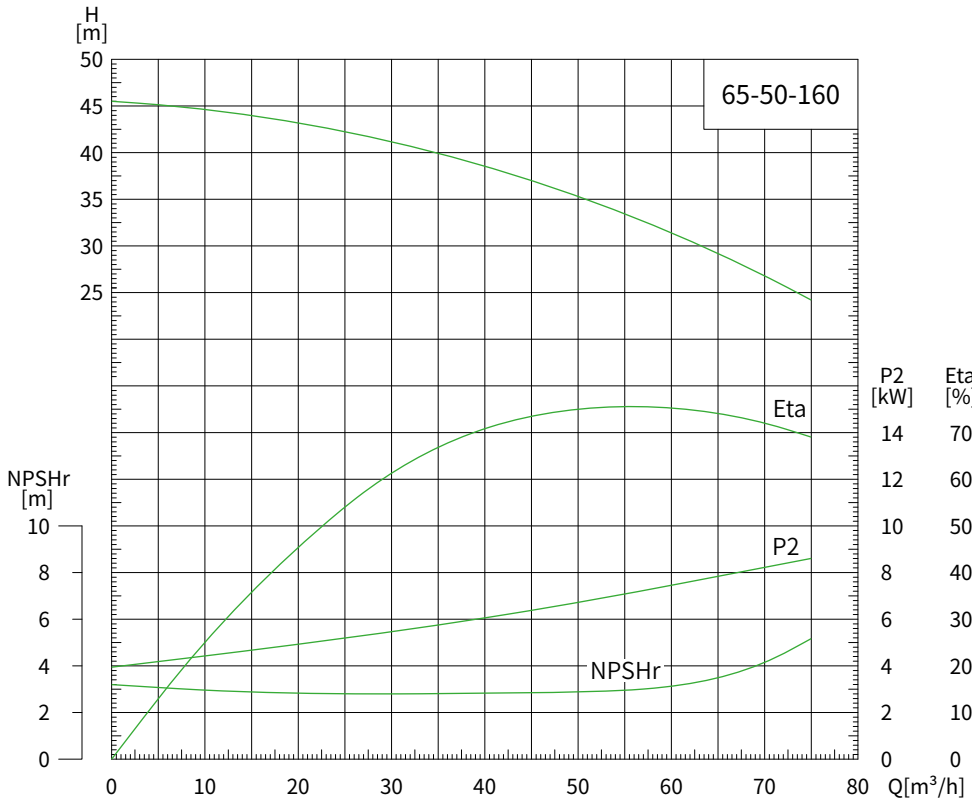


Performance Curves




50Hz 2-pole motor

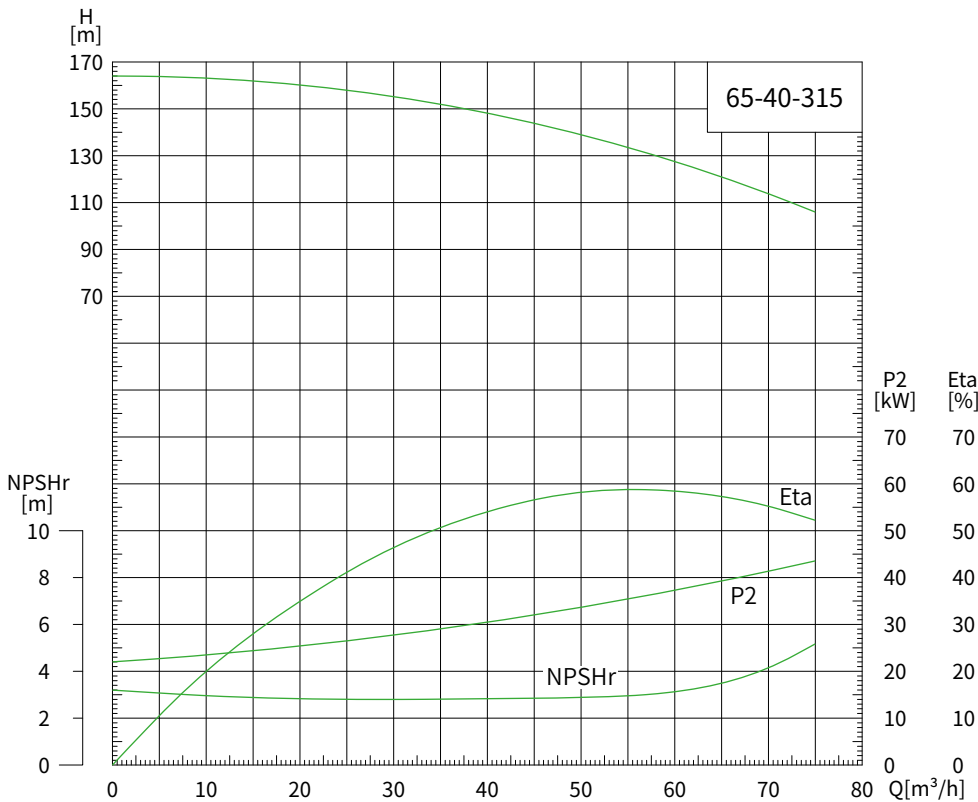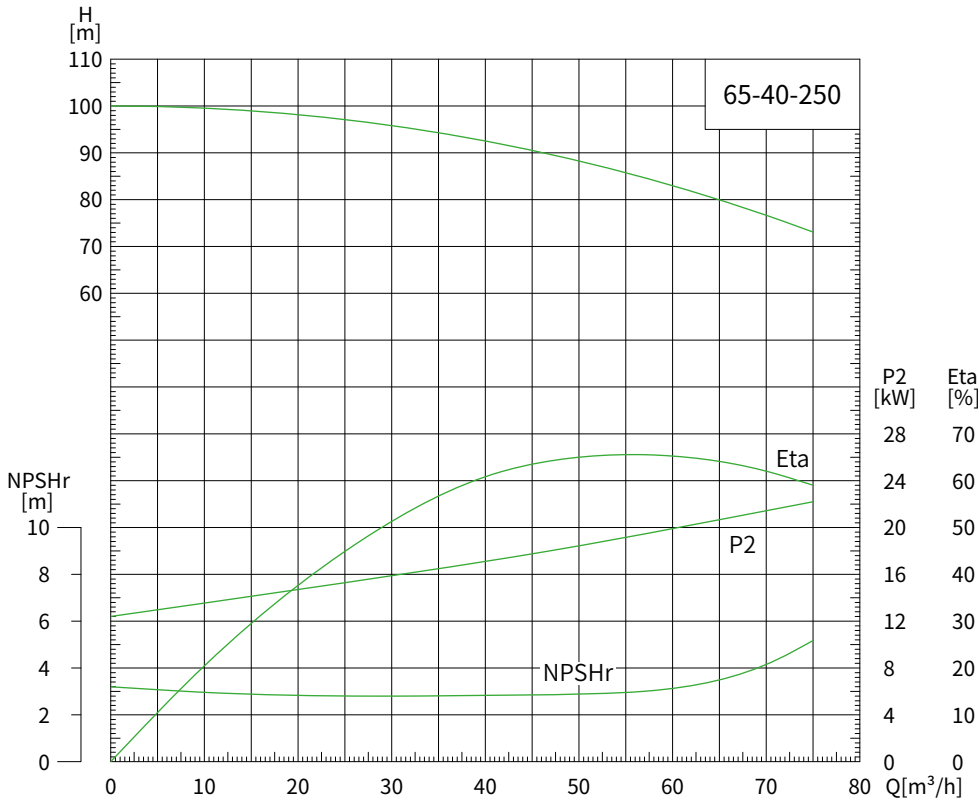



Performance Curves 50Hz 2-pole motor

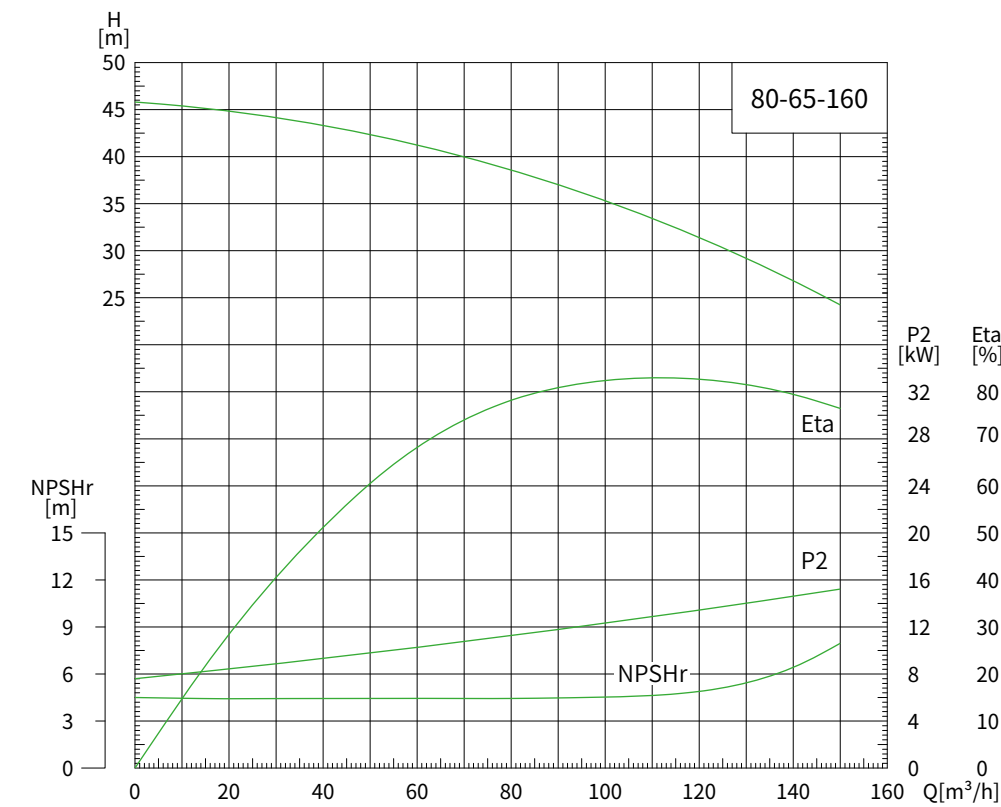



Performance Curves 50Hz 2-pole motor

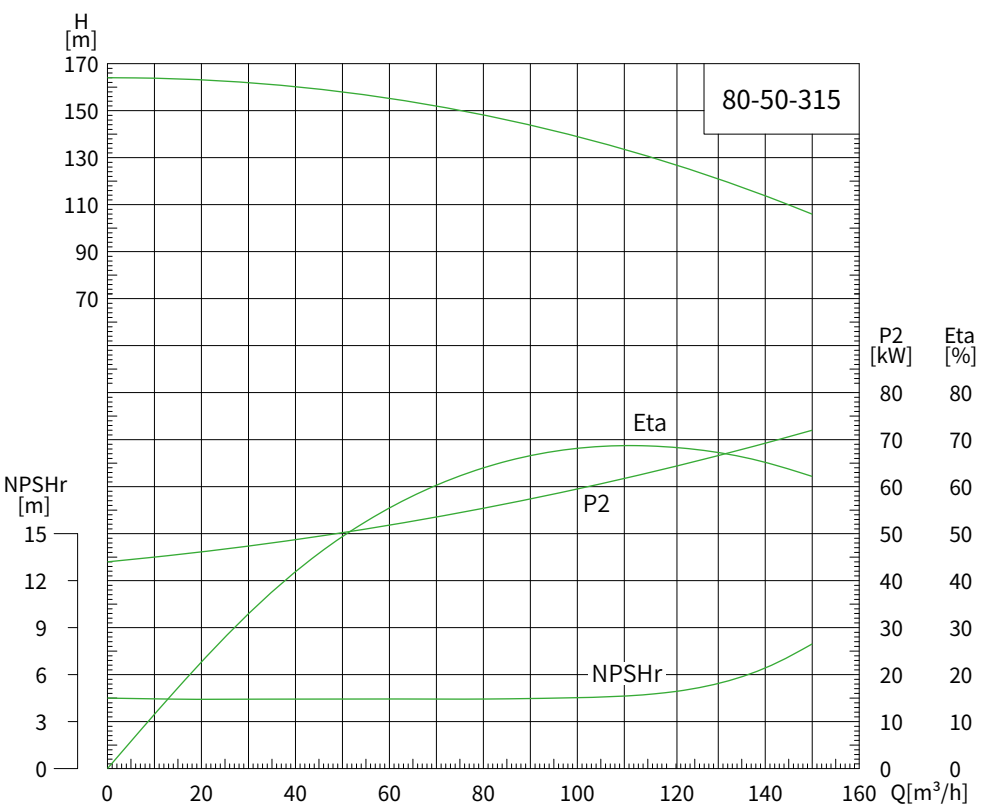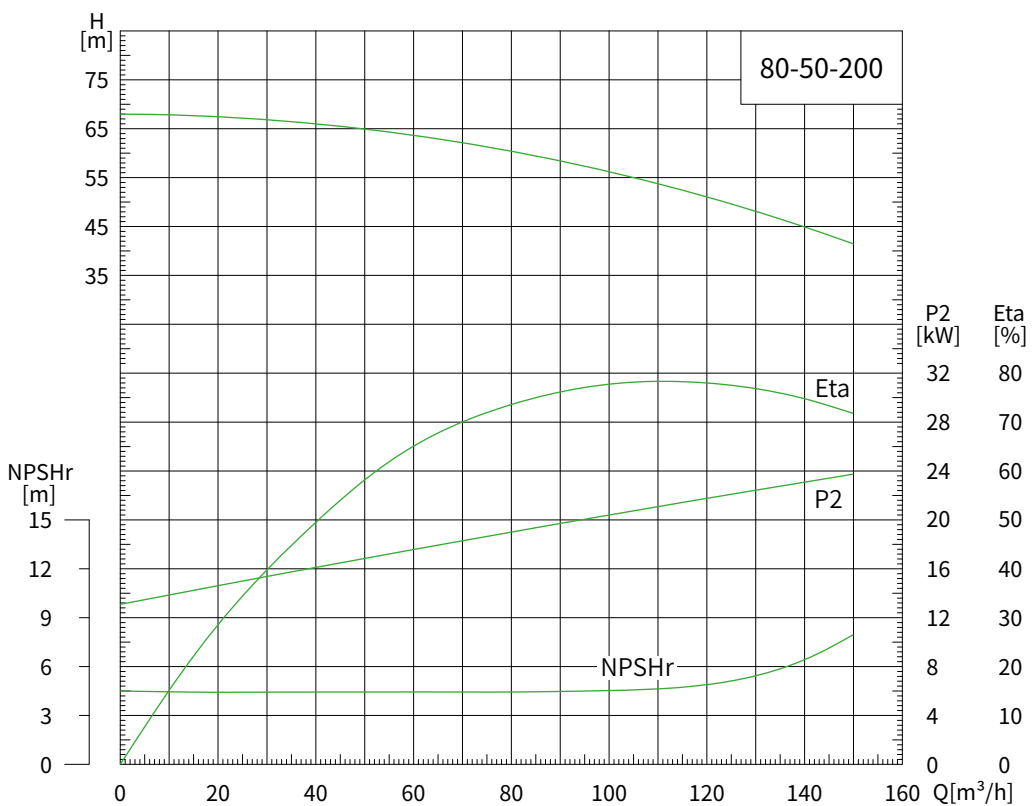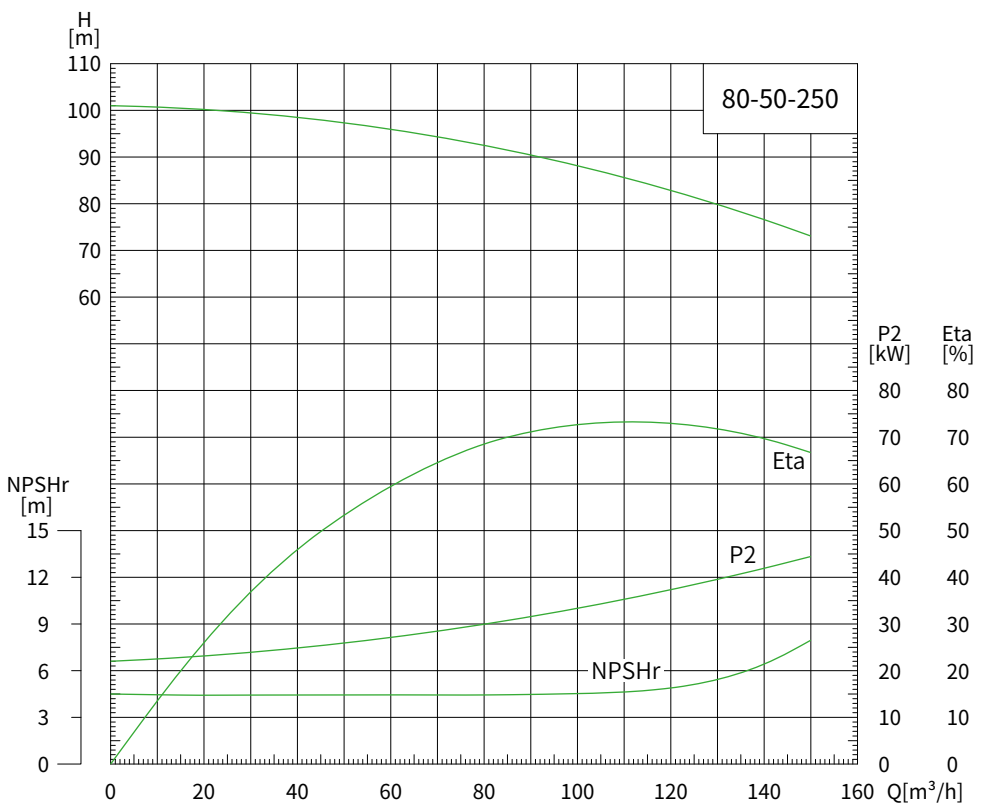



Performance Curves 50Hz 2-pole motor

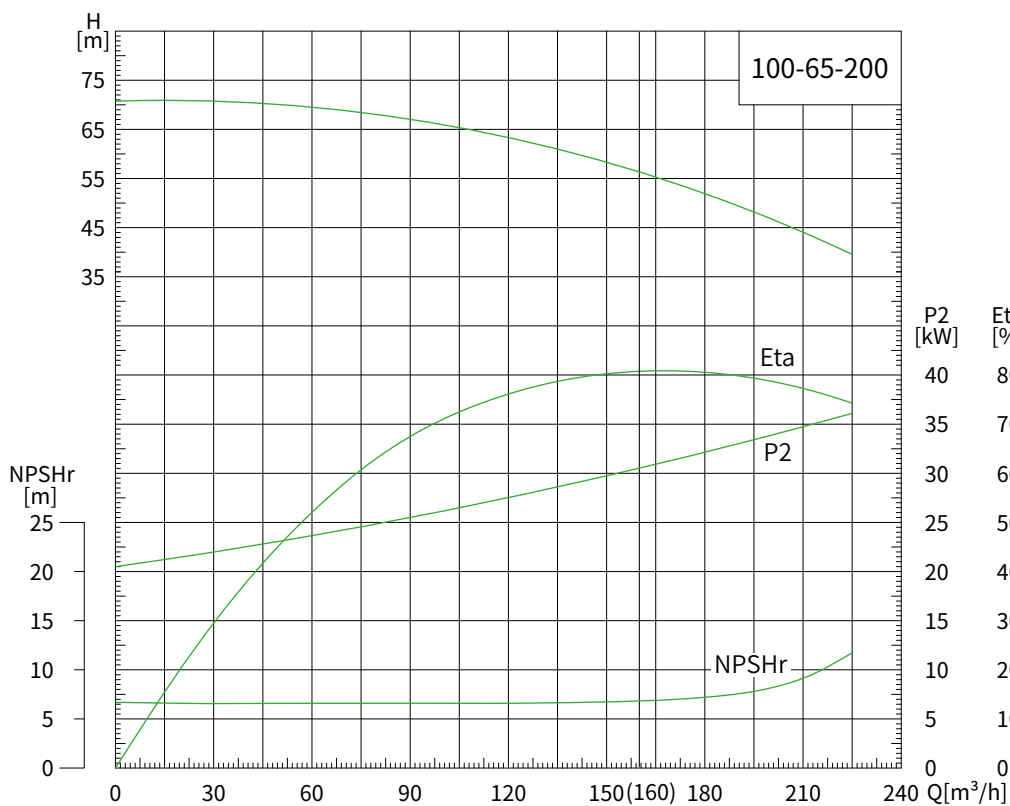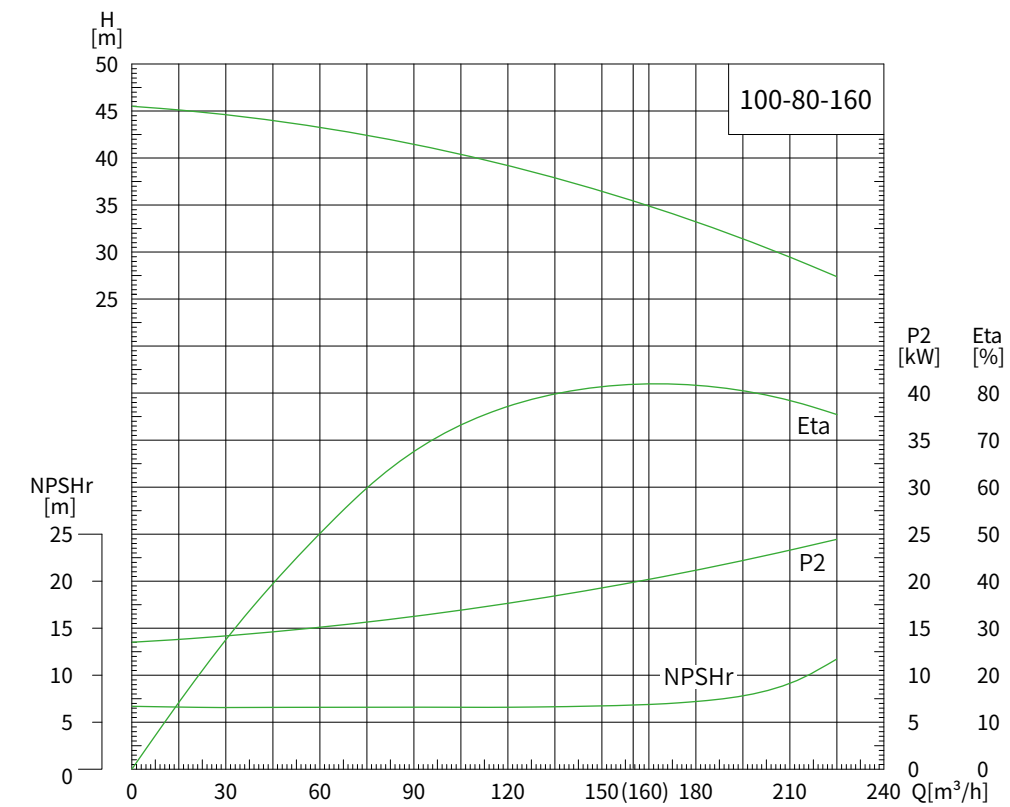



Performance Curves 50Hz 2-pole motor

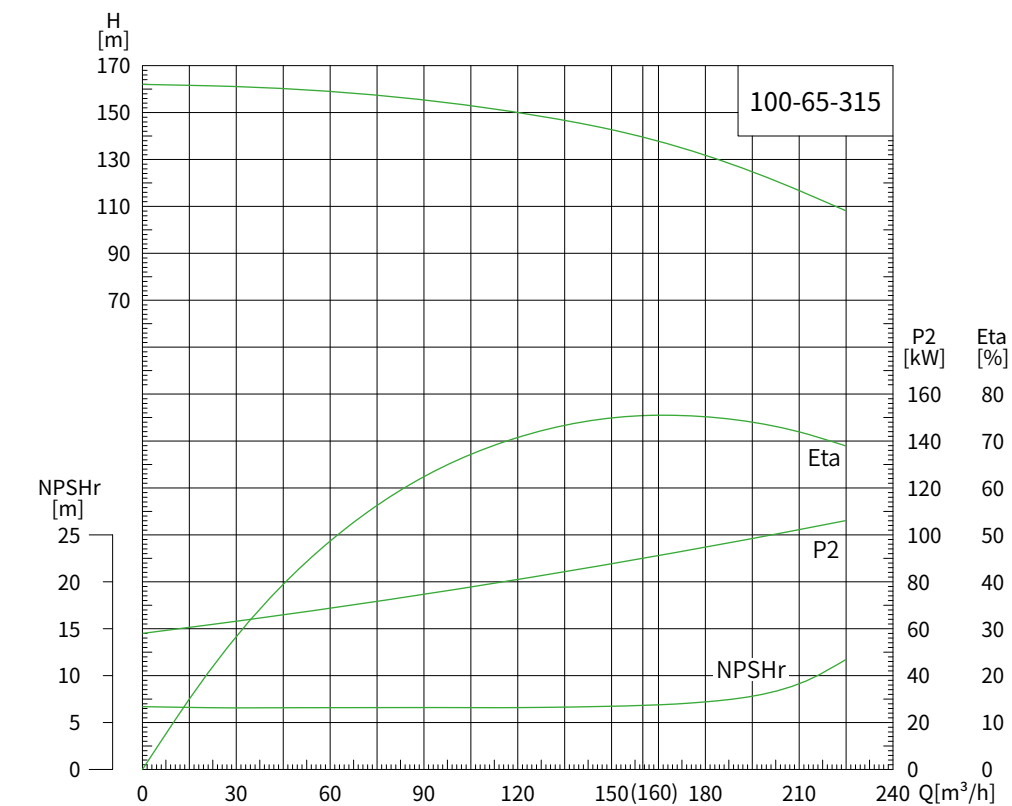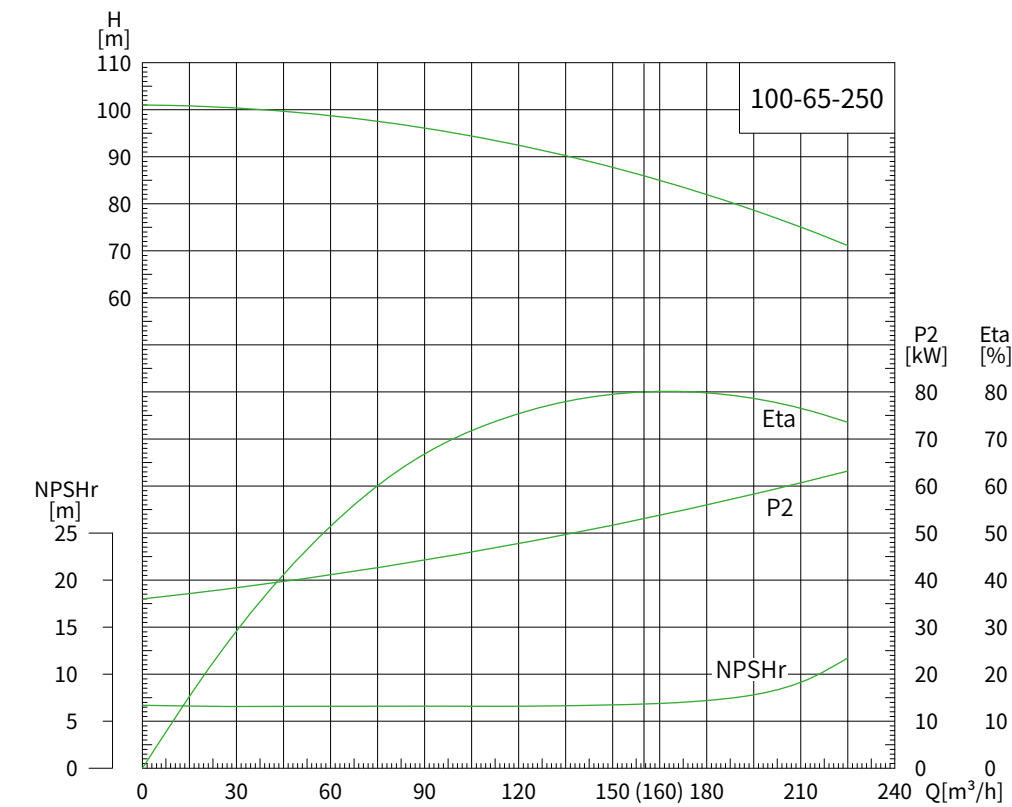


Performance Curves 50Hz 2-pole motor

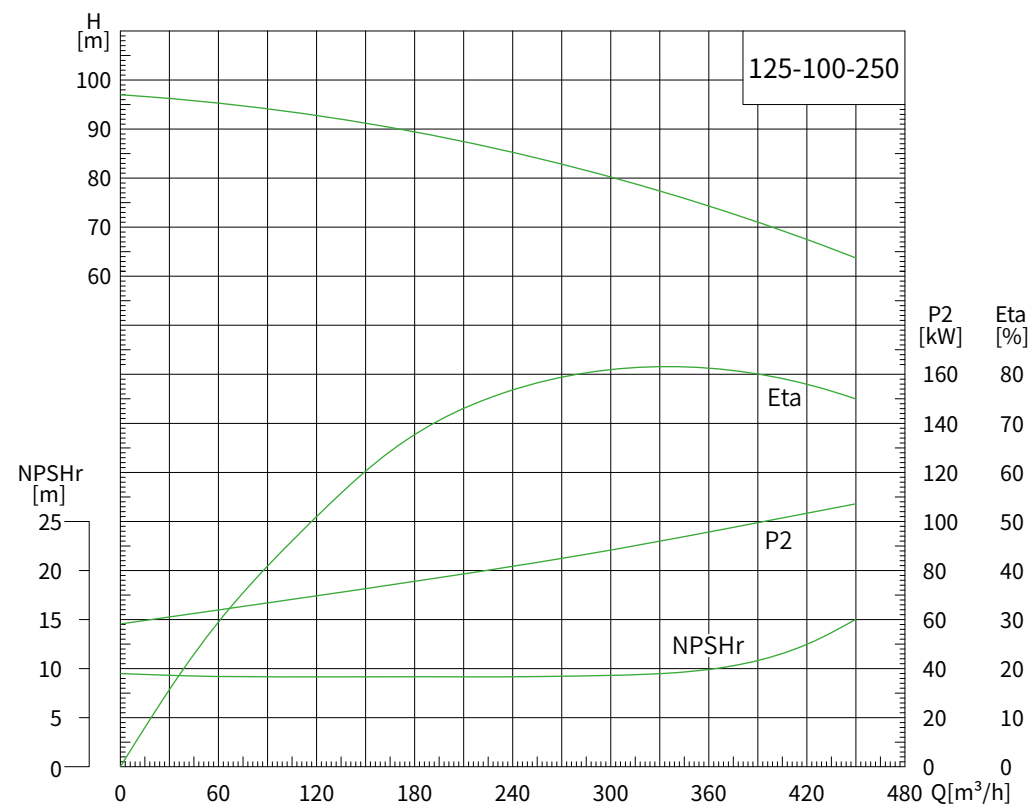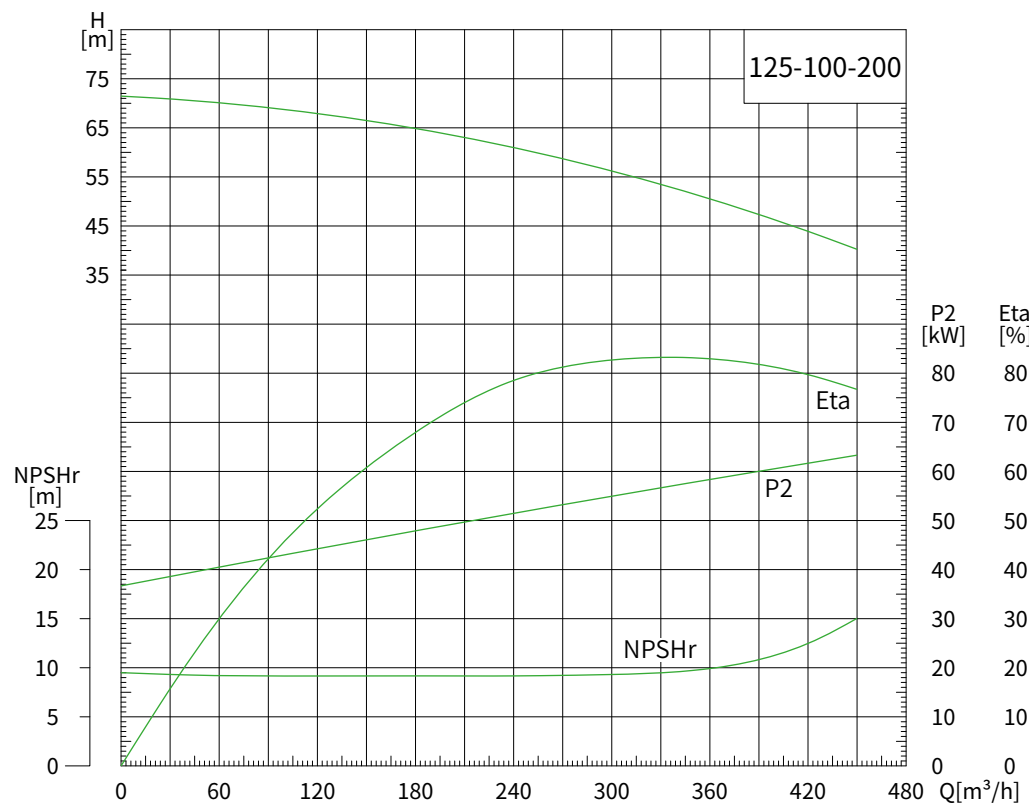

Performance Curves 50Hz 2-pole motor

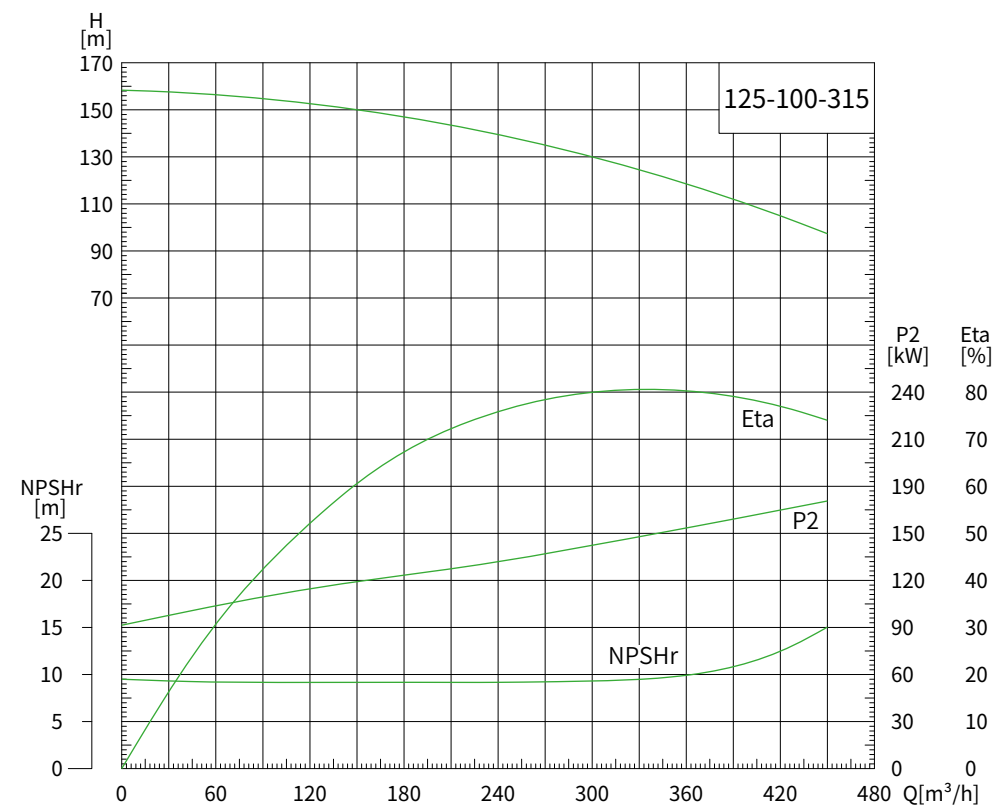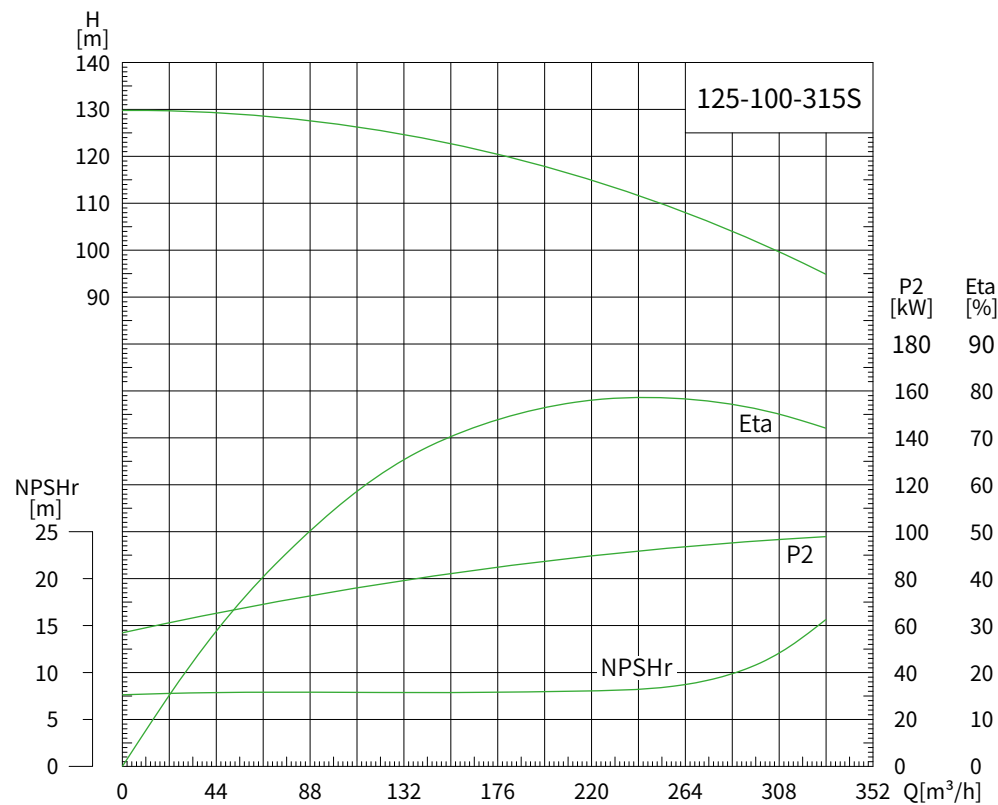

Installation Dimension

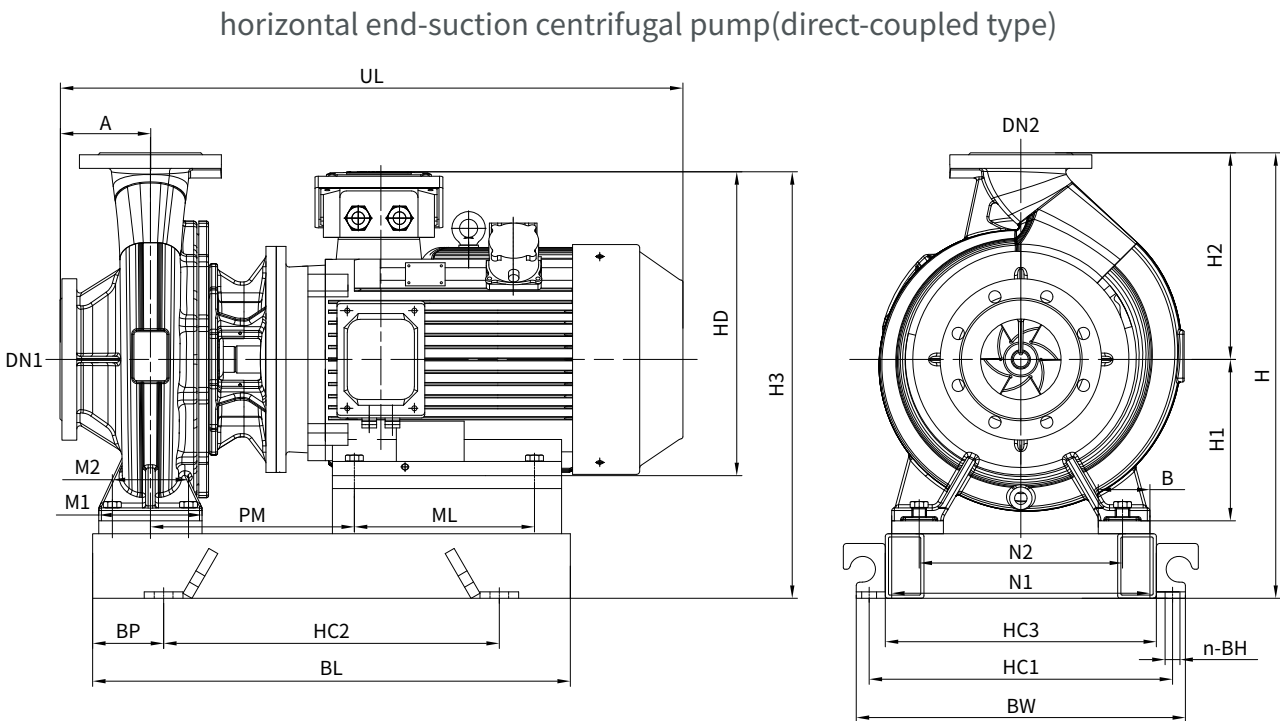

4-pole motor

Model	Motor	Inlet flange		Outlet flange	Overall dimensions of the single pump body												Overall dimensions of the unit									
	kW	DN1	DN2		A	B	N1	N2	M1	M2	H1	H2	PM	ML	HD	UL	BP	HC1	HC2	HC3	BW	BL	n-BH	H	H3	
50-32-200	0.75	50	92	80	50	240	190	100	70	160	195	216	100	250	495	50	905	300	260	340	400	4-15	435	410		
	1.1	50	92									216	100	260	520	55	905	300	260	340	410	4-15	435	410		
65-50-160	0.75	65	50	80	50	240	190	100	70	132	170	216	100	250	495	50	905	300	260	340	400	4-15	382	382		
	1.1	65	50									216	100	260	520	55	905	300	260	340	410	4-15	382	382		
65-40-200	1.1	65	40	100	50	265	212	100	70	160	200	216	100	260	540	55	925	300	280	360	410	4-15	440	410		
	1.5	65	40									216	125	260	565	70	325	300	280	360	440	4-15	440	410		
	2.2	65	40									223	140	280	610	80	325	300	280	360	460	4-15	440	420		
65-40-250	22	65	40	100	50	320	250	125	95	180	225	247	140	280	610	80	375	300	330	410	460	4-15	485	440		
	3	65	40									247	140	280	610	80	375	300	330	390	460	4-15	485	440		
65-40-315	4	65	40	125	65	345	280	125	95	220	260	257	140	310	645	95	405	300	360	440	490	4-15	560	498		
	5.5	65	40									257	140	330	695	85	405	350	360	440	520	4-18	560	498		
80-65-160	1.1	80	65	100	50	265	212	100	70	160	180	216	100	260	540	55	325	300	280	360	410	4-15	420	410		
	1.5	80	65									216	125	260	565	70	325	300	280	360	440	4-15	420	410		
	2.2	80	65									223	140	280	610	80	325	300	280	360	460	4-15	420	420		
80-50-200	2.2	80	50	100	50	265	212	100	70	160	205	223	140	280	610	80	325	300	280	360	460	4-15	445	420		
	3	80	50									223	140	280	610	80	325	300	280	360	460	4-15	445	420		
80-50-250	4	80	50	125	65	320	250	125	95	180	230	245	140	310	660	70	385	350	340	420	490	4-15	490	458		
	5.5	80	50									269	140	330	675	80	385	350	340	420	510	4-18	490	458		
80-50-315	5.5	80	50	125	65	345	280	125	95	225	280	269	140	330	675	80	405	350	360	440	510	4-18	585	503		
	7.5	80	50									269	178	330	715	75	405	400	360	440	550	4-18	585	503		
	11	80	50									293	210	420	780	80	405	450	360	440	610	4-18	585	565		
	2.2	100	80									223	140	280	610	85	345	300	300	380	470	4-15	455	420		
100-80-160	3	100	80	100	65	280	212	125	95	160	215	223	140	280	610	85	345	300	300	380	470	4-15	455	420		
	3	100	65									238	140	280	625	70	985	350	340	420	490	4-15	485	440		
100-65-200	4	100	65	100	65	320	250	125	95	180	225	245	140	310	635	70	385	350	340	420	490	4-15	485	458		
	5.5	100	65									269	140	330	650	80	985	350	340	420	510	4-18	485	458		
	55	100	65									100	65	360	280	160	120	200	250	269	140	330	675	90	425	350
7.5	100	65	269	178	330	718	90	425	400	380	460									580	4-18	530	478			


Model	Motor	Inlet flange	Outlet flange	Overall dimensions of the single pump body												Overall dimensions of the unit									
	kW	DN1	DN2	A	B	N1	N2	M1	M2	H1	H2	PM	ML	HD	UL	BP	HC1	HC2	HC3	BW	BL	n-BH	H	H3	
100-65-315	7.5	100	65	125	80	400	315	160	120	225	280	283	178	330	725	90	465	400	420	500	580	4-18	585	503	
	11	100	65									303	210	420	825	95	465	450	420	500	640	4-18	585	565	
	15	100	65									303	254	420	880	95	465	500	420	500	690	4-18	585	565	
125-100-200	5.5	125	100	125	80	360	280	160	120	200	280	269	140	330	690	90	425	350	380	460	530	4-18	560	478	
	7.5	125	100									269	178	330	715	85	425	400	380	460	570	4-18	560	478	
	11	125	100									293	210	420	815	100	425	430	380	460	630	4-18	560	540	
125-100-250	11	125	100	140	80	400	315	160	120	225	290	302	210	420	845	95	465	450	420	500	640	4-18	595	565	
	15	125	100									302	254	420	895	95	465	500	420	500	690	4-18	595	565	
	15	125	100									303	254	420	895	100	470	520	420	510	720	4-18	690	630	
125-100-315	18.5	125	100	140	80	400	315	160	120	250	320	316	241	450	905	100	470	540	420	510	740	4-18	690	640	
	22	125	100									316	279	450	965	100	470	540	420	510	740	4-18	690	640	
	22	125	100									311	279	450	960	105	570	550	520	610	760	4-18	760	670	
125-100-400	30	125	100	140	100	500	400	200	149	280	360	328	305	510	995	100	570	600	520	610	800	4-18	760	710	
	37	125	100									354	286	550	1020	105	570	600	520	610	810	4-18	760	725	
	18.5	150	125									316	241	450	925	100	470	500	420	510	700	4-18	725	640	
150-125-250	22	150	125	140	80	400	315	160	149	250	355	316	279	450	965	110	470	520	420	510	740	4-18	725	640	
	30	150	125									333	305	510	998	115	470	550	420	510	780	4-18	755	680	
	90	150	125									348	905	510	1015	105	570	600	520	610	810	4-18	755	710	
150-125-315	37	150	125	140	100	500	400	200	149	280	355	369	286	550	1060	110	570	600	520	610	820	4-18	755	725	
	45	150	125									369	311	550	1065	100	570	650	520	610	850	4-18	755	725	
	45	150	125									369	311	550	1075	105	570	650	520	620	860	4-18	835	760	
150-125-400	55	150	125	140	100	500	400	200	149	315	400	393	349	680	1140	105	570	700	520	620	910	4-18	835	865	
	75	150	125									415	368	720	1255	105	620	750	570	670	960	4-18	835	875	
	30	200	150									333	305	510	1020	100	570	600	520	620	800	4-22	775	710	
200-150-250	37	200	150	160	100	500	400	200	149	280	375	354	286	550	1035	100	570	620	520	620	820	6-22	775	725	
	45	200	150									354	311	550	1080	100	570	640	520	620	840	6-22	775	725	
	45	200	150									369	311	550	1095	105	620	650	570	670	860	6-22	835	760	
200-150-315	55	200	150	150	100	550	450	200	149	315	400	393	349	680	1160	105	620	700	570	670	910	6-22	835	865	
	75	200	150									415	368	720	1230	105	620	750	570	670	960	6-22	835	875	
	75	200	150									415	358	720	1220	105	620	750	570	670	960	6-22	885	875	
200-150-400	90	200	150	160	100	550	450	200	149	315	450	415	419	720	1270	100	620	410	570	670	1020	6-22	885	875	
	110	200	150									446	406	870	1322	100	700	430	650	750	1060	6-22	905	1010	
	132	200	150									446	457	870	1600	100	700	485	650	750	1170	6-27	990	1070	
200-150-500	160	200	150	180	100	550	450	200	149	375	475	446	508	870	1600	100	700	485	650	750	1170	6-27	990	1070	
	200	200	150									446	508	870	1600	100	700	485	650	750	1170	6-27	990	1070	
	45	250	200									364	311	550	1103	100	620	650	570	670	850	6-27	835	760	
250-200-250	55	250	200	170	100	550	450	200	149	315	400	389	349	680	1169	105	620	700	570	670	910	6-27	835	865	
	55	250	200									403	349	680	1175	110	620	700	570	670	920	6-27	835	865	
	75	250	200									425	368	720	1235	110	620	770	570	670	970	6-27	835	875	
250-200-315	90	250	200	160	100	550	450	200	149	315	400	425	419	720	1285	100	620	410	570	670	1020	6-27	835	875	
	110	250	200									451	406	870	1350	100	700	435	650	750	1070	6-27	965	1045	
	132	250	200									451	457	870	1570	100	700	490	650	750	1180	6-27	965	1045	
250-200-400	160	250	200	160	100	600	500	200	149	350	475	451	508	870	1570	100	700	490	650	750	1180	6-27	965	1045	
	55	300	250									393	349	680	1200	105	620	700	570	670	910	6-27	895	900	
	75	300	250									415	368	720	1260	105	620	750	570	670	960	6-27	895	910	
300-250-250	90	300	250	180	100	600	500	200	149	350	425	415	419	720	1310	100	620	405	570	670	1010	6-27	895	910	
	75	300	250									428	368	720	1250	110	670	750	620	720	970	6-27	920	910	
	90	300	250									459	406	870	1355	100	670	435	620	720	1070	6-27	940	1045	
300-250-315	110	300	250	180	100	600	500	200	149	400	500	453	406	870	1355	90	700	450	650	750	1080	6-27	1040	1095	
	132	300	250									453	457	870	1600	140	700	450	650	750	1180	6-27	1040	1095	
	160	300	250									453	508	870	1600	140	700	450	650	750	1180	6-27	1040	1095	
300-250-400	200	300	250	180	100	600	500	200	149	400	500	453	508	870	1600	140	700	450	650	750	1180	6-27	1040	1095	
	200	300	250									453	508	870	1600	140	700	450	650	750	1180	6-27	1040	1095	
	200	300	250									453	508	870	1600	140	700	450	650	750	1180	6-27	1040	1095	

LAIKO

50Hz 2-pole motor																									
Model	Motor	Inlet flange	Outlet flange	Overall dimensions of the single pump body												Overall dimensions of the unit									
	kW	DN1	DN2	A	B	N1	N2	M1	M2	H1	H2	PM	ML	HD	UL	BP	HC1	HC2	HC3	BW	BL	n-BH	H	H3	
40-32-125	0.75	40	32	80	50	210	160	90	60	115	140	468	100	250	743	100	275	460	230	310	660	4-15	335	365	
	11	40	32									478	100	250	753	100	275	460	230	310	660	4-15	335	365	
40-32-160	1.5	40	32	80	50	240	190	90	60	132	155	488	100	260	777	100	305	480	260	340	680	4-15	377	382	
	2.2	40	32									488	125	260	802	100	305	510	260	340	710	4-15	377	382	
	3	40	32									505	140	200	872	100	305	540	260	340	740	4-15	377	392	
50-32-125	1.1	50	92	80	50	210	160	90	50	115	140	478	100	250	753	100	275	460	230	910	660	4-15	335	365	
	1.5	50	32									484	100	260	773	100	275	470	230	310	670	4-15	335	365	
	2.2	50	92									488	125	260	802	100	305	510	260	940	710	4-15	382	382	
50-32-160	3	50	32	80	50	240	190	90	60	132	170	505	140	280	872	100	305	540	260	940	740	4-15	382	392	
	4	50	32									512	140	310	872	100	305	540	260	340	740	4-15	382	410	
	4	50	32									520	140	310	870	100	305	550	260	940	750	4-18	445	438	
50-32-200	5.5	50	92	80	50	240	190	100	70	160	195	559	140	330	942	100	325	600	280	360	800	4-18	445	438	
	7.5	50	32									559	140	330	942	100	325	600	280	360	800	4-18	445	438	
	2.2	65	50									484	125	260	798	100	275	560	230	310	760	4-15	335	370	
65-50-125	3	65	50	80	50	210	160	90	60	120	150	501	140	280	843	100	275	590	230	310	790	4-15	335	380	
	5.5	65	50									559	140	330	940	100	325	590	280	360	790	4-18	382	410	
65-50-160	7.5	65	50	80	50	240	190	100	70	132	170	559	140	330	940	100	325	590	280	360	790	4-18	382	410	
	11	65	50									608	210	420	1085	100	375	710	330	410	910	4-18	410	500	
	11	65	40									608	210	420	1105	100	375	710	330	410	910	4-18	440	500	
65-40-200	15	65	40	100	50	265	212	100	70	160	200	608	210	420	1105	100	375	710	330	410	910	4-18	440	500	
	15	65	40									608	210	420	1105	100	375	730	330	410	930	4-18	485	520	
	15	65	40									608	210	420	1105	100	375	780	330	410	980	4-18	485	520	
65-40-250	18.5	65	40	100	50	320	250	125	95	180	225	608	254	420	1160	100	375	780	330	410	980	4-18	485	520	
	22	65	40									621	241	450	1200	100	415	780	370	450	980	4-18	485	530	
	30	65	40									753	305	510	1400	100	470	490	420	510	1180	6-18	600	650	
65-40-315	37	65	40	125	65	345	280	125	95	220	260	753	305	510	1400	100	470	490	420	510	1180	6-18	600	650	
	45	65	40									764	311	550	1455	100	500	510	450	540	1220	6-18	605	670	
	75	80	65									559	140	330	945	100	325	590	280	360	790	4-18	420	438	
80-65-160	11	80	65	100	50	265	212	100	70	160	180	603	210	420	1100	100	385	710	340	420	910	4-18	420	500	
	15	80	65									603	210	420	1100	100	385	710	340	420	910	4-18	420	500	
	18.5	80	50									612	254	420	1165	100	385	770	340	420	970	4-18	445	500	
80-50-200	22	80	50	100	50	265	212	100	70	160	205	625	241	450	1195	100	415	770	370	450	970	4-18	465	530	
	30	80	50									636	305	510	1360	100	470	430	420	510	1060	6-18	525	630	
	30	80	50									748	305	510	1400	100	470	500	420	510	1200	6-18	550	630	
80-50-250	37	80	50	125	65	320	250	125	95	180	230	748	305	510	1400	100	470	500	420	510	1200	6-18	550	630	
	45	80	50									764	311	550	1455	100	510	510	460	550	1220	6-18	575	670	
	45	80	50									764	311	550	1455	100	500	510	450	540	1220	6-18	625	670	
80-50-315	55	80	50	125	65	345	280	125	95	225	280	813	349	680	1545	100	570	550	520	610	1300	6-18	650	800	
	75	80	50									835	368	720	1505	100	625	575	570	680	1350	6-22	680	840	
	15	100	80									608	210	420	1080	100	385	400	340	420	930	4-18	455	500	
100-80-160	18.5	100	80	100	65	280	212	125	95	160	215	G08	254	420	1160	100	385	450	340	420	980	4-18	455	500	
	22	100	80									621	241	450	1190	100	415	450	370	450	980	4-18	475	530	
	22	100	65									736	241	450	1305	100	415	450	370	450	1100	6-18	485	530	
100-65-200	30	100	65	100	65	320	250	125	95	180	225	748	305	510	1375	100	470	510	420	510	1220	6-18	545	630	
	37	100	65									748	305	510	1375	100	470	510	420	510	1220	6-18	545	630	
	45	100	65									764	311	550	1455	100	500	515	450	540	1230	6-18	595	670	
100-65-250	55	100	65	100	65	360	280	160	120	200	250	813	349	680	1545	100	570	560	520	610	1320	6-18	620	800	
	75	100	65									835	368	720	1605	100	620	590	570	650	1380	6-22	650	840	
	75	100	65									865	368	720	1635	100	625	600	570	670	1400	6-22	680	840	
100-65-315	90	100	65	125	80	400	315	160	120	225	280	865	419	720	1685	100	625	625	570	670	1450	6-22	680	840	
	110	100	65									881	406	870	1735	100	700	650	650	750	1500	6-22	735	1010	
	45	125	100									764	311	550	1455	100	500	515	450	540	1230	6-18	625	670	
125-100-200	55	125	100	125	80	360	280	160	120	200	280	818	349	600	1550	100	570	560	520	610	1320	6-18	650	800	
	75	125	100									840	368	720	1610	100	620	600	570	660	1400	6-22	680	840	
	55	125	100									747	349	680	1595	100	570	575	520	620	1350	6-18	660	800	
125-100-250	75	125	100	140	80	400	315	160	120	225	290	869	368	720	1655	100	625	600	570	670	1400	6-22	690	840	
	90	125	100									869	419	720	1705	100	625	625	570	670	1450	6-22	690	840	
	110	125	100									891	406	870	1860	100	700	650	650	750	1500	6-27	755	1010	
125-100-315	132	125	100	140	80	400	315	160	120	250	320	891	457	870	2000	100	700	700	650	750	1600	6-27	755	1010	
	160	125	100									891	508	870	2000	100	700	700	650	750	1600	6-27	755	1010	

54 A

Dimensions of Pump Body Flange

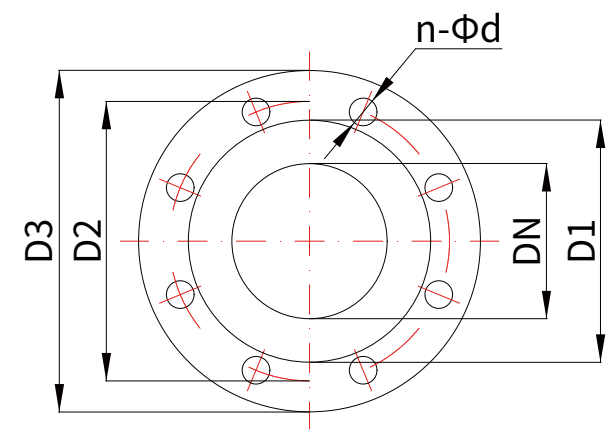

Flange dimensions					
DN	D1	D2	D3	n	d
32	76	100	140	4	18
40	84	110	150	4	18
50	102	125	165	4	18
65	122	145	185	4	18
80	133	160	200	8	18
100	158	180	220	8	18
125	184	210	250	8	18
150	212	240	285	8	22
200	268	295	340	12	22
250	320	355	405	12	26
300	370	410	460	12	26

Laiko Pump (Zhejiang) Co., Ltd.